

Furnotel

Bring Gourmet To The World

KITCHEN EQUIPMENT

Furnotel[®]

China Head Office

Email: info@furnotel.cn Tel: +86 20 34709971

Fax: +86 20 34709972 Web: www.furnotel.cn

Add: 705 No.1 Headquarters Center Tian An Hi-Tech Ecological Park,
Panyu Avenue, Guangzhou, China

UAE Branch

Email: info@shinobal.com Tel: +971 48818889

Web: www.shinobal.com

Add: Showroom 5b, Abdulla Haji Kamber Building, Salah Al Din Road,
Hor-Al-Anz, Deira, Dubai, UAE (Near Abu Baker Metro Station Exit 2)

This information has been carefully checked to be accurate. Guangzhou Shinobal Kitchen Equipment Co.,LTD. reserves the right to change product designs and specifications are subject to change without notice. Guangzhou Shinobal Kitchen Equipment Co.,LTD. has the appearance of the product of the alum patents, unauthorized use of the reserve liability.



CONTENTS

700/900 Series Cooking Equipment	001
Holding Cabinet	034
X Series Cooking Range	041
Max Series Cooking Range	075
Refrigeration Equipment	095
Snack Equipment	141
Other	169

Technology to facilitate the operation and maintenance



The harmonious shape of worktops is perfect for an easy cleaning, the shape and inclination of the knobs make it easy to use and read.



Griddle

Flat/grooved area, designed for different need of taste.



Hot plate cooker

The square-plate design is specific to the 900 series, very neat and beautiful appearance.



Gas range with burners





The optimal size of pot support, apply to most pots.

Details demonstrate classic quality

Gas Cooking Range



- *Burner is made by precision forging
- *High-quality anti-corrosion 304 stainless steel
- *Imported thermocouple, longer life than common type at least half a year

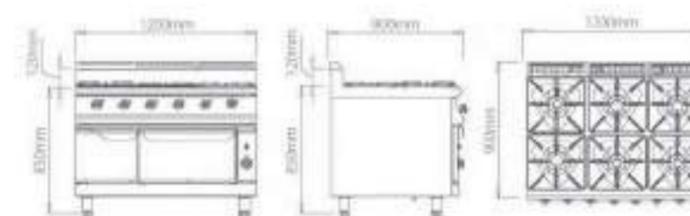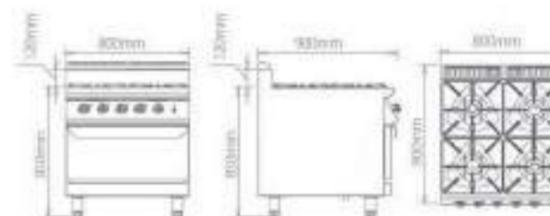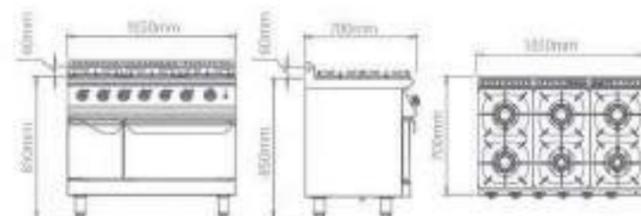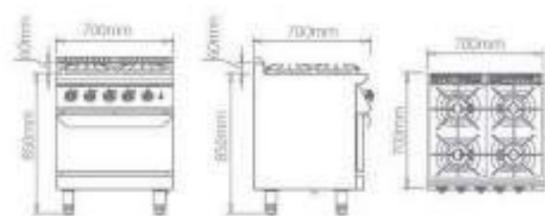

FEGR0707GO

700 Series
4-Burner Gas Range With Oven

FEGR1007GO

700 Series
6-Burner Gas Range With Oven

FEGR0809GO

900 Series
4-Burner Gas Range With Oven

FEGR1209GO

900 Series
6-Burner Gas Range With Oven

Dimension	700 x 700 x 850+60mm	1050 x 700 x 850+60mm	800 x 900 x 850+120mm	1200 x 900 x 850+120mm
Power	28KW	38.8KW	27.8KW	38.8KW
Oven Power	6KW	5.8KW	5.8KW	5.8KW
Net Weight	113.5KG	147KG	136KG	180.5KG
Oven Inside Dimension	550 x 570 x 250mm	550 x 570 x 250mm	550 x 680 x 290mm	550 x 680 x 290mm
Power Range	5.5KW x 4	6KW x 3 + 5KW x 3	6KW x 2 + 5KW x 2	6KW x 3 + 5KW x 3
LPG Pressure	2800pa	2800pa	2800pa	2800pa
LPG Consumption	2.0 KG/h	2.788 KG/h	2.0 KG/h	2.788 KG/h
NG Pressure	2000pa	2000pa	2000pa	2000pa
NG Consumption	3.8 m3/h	4.106 m3/h	2.95 m3/h	4.106 m3/h

Griddle



Evenly heat distribution

Divide into flat and grooved area, independent temperature control.

700/900 series Gas / Electric Griddle

700 Series Gas 2/3 Flat 1/3 Grooved Griddle With Cabinet

700 Series Electric 2/3 Flat 1/3 Grooved Griddle With Cabinet

*Chrome-plated griddle surface, grooved/flat griddle surface.

*Efficient heat transfer throughout the cooking area.

*With splash board, non-sticking grease.

*Detachable griddle board, easy cleaning.

*Slightly sloped working surface, convenient for sauce cleaning.

900 Series Gas 2/3 Flat 1/3 Grooved Griddle With Cabinet

900 Series Electric 2/3 Flat 1/3 Grooved Griddle With Cabinet

*Stainless steel tubular dual-flame burner, to heat two cooking zones controlled by their respective controls.


*Pilot flame and thermocouple safety valve.

*Piezoelectric ignition with rubber protection.

*The particular design allows one to cook fish, meat and vegetables, preventing fat from burning.

*All components can be easily disassembled for regular operations of maintenance and cleaning.



*Large compartment completely in steel.

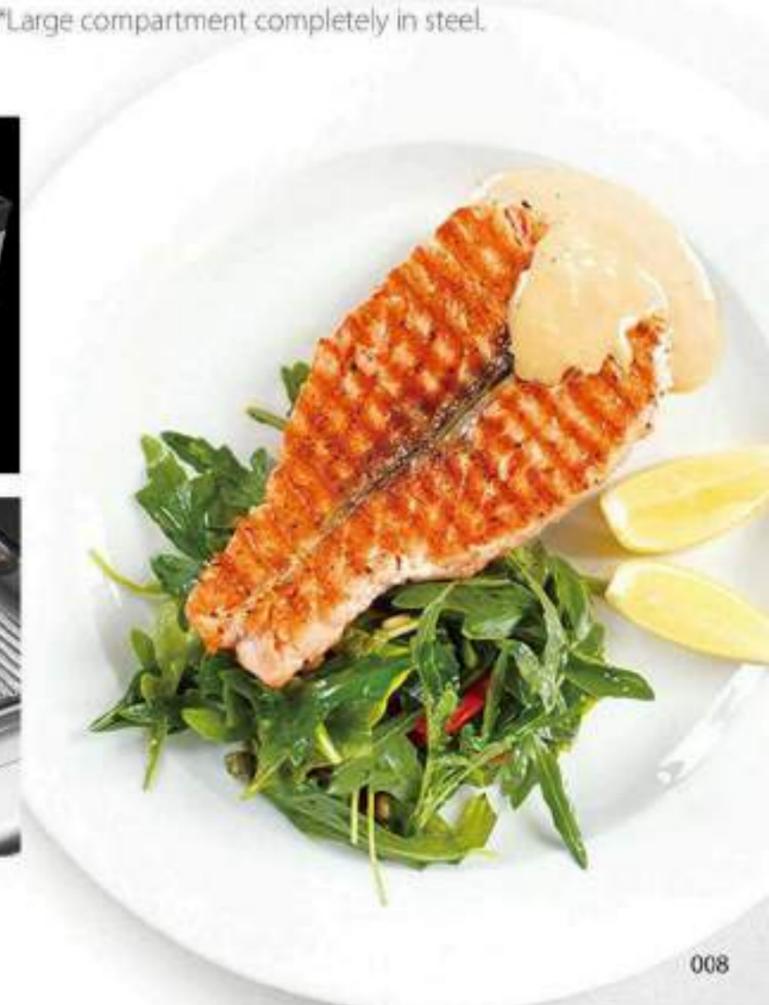

Griddle



* Each individual thermostat controls one-half of the cooking surface.
The series griddles feature "heat bank" technology-giving you significantly faster and more evenly distributed heat than typical gas fired griddle.

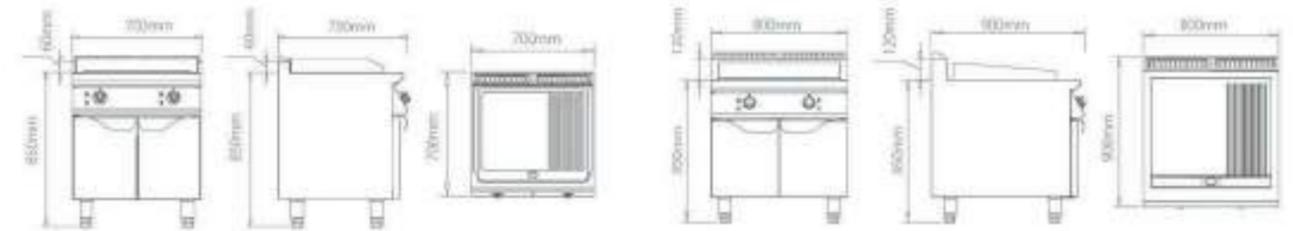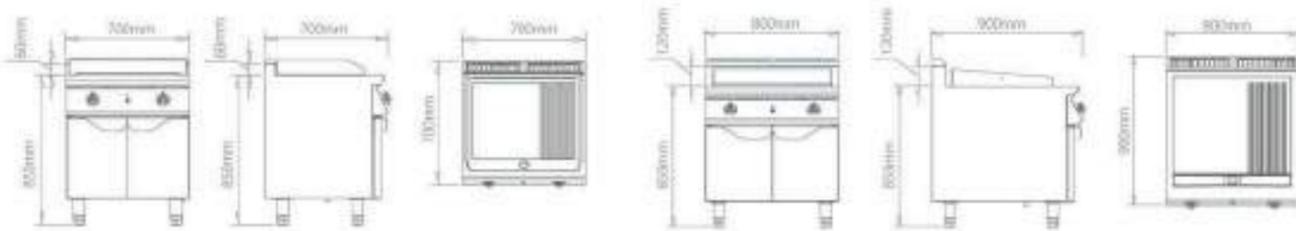

FEGD0707GCG13

700 Series
Gas 2/3 Flat 1/3 Grooved Griddle With Cabinet

FEGD0809GCG13

900 Series
Gas 2/3 Flat 1/3 Grooved Griddle With Cabinet

FEGD0707ECG13

700 Series
Electric 2/3 Flat 1/3 Grooved Griddle With Cabinet

FEGD0809ECG13

900 Series
Electric 2/3 Flat 1/3 Grooved Griddle With Cabinet

Dimension	700 x 700 x 850+60mm	800 x 900 x 850+120mm	700 x 700 x 850+60mm	800 x 900 x 850+120mm
Griddle Size	600 x 460 x 16mm	700 x 580 x 16mm	600 x 460 x 16mm	700 x 580 x 16mm
Power	10KW	15KW	9KW	12KW
Net Weight	92KG	140KG	89.5KG	125KG
Voltage	/	/	380V/50Hz	380V/50Hz
LPG Pressure	2800pa	2800pa	/	/
LPG Consumption	0.72 KG/h	1.078 KG/h	/	/
NG Pressure	2000pa	2000pa	/	/
NG Consumption	1.05 m3/h	1.587 m3/h	/	/

*Italy PEL valve or Taiwan ALPHA valve with CE certification. *With fire observation hole. *Temperature:50~300°C

*The heater and control with CE certification. *The heater and control with CE certification. *Temperature:50~300°C

Gas Grill

700 series

Gas Lava Rock Grill With Cabinet

- *Selected high-quality stainless steel, anti-corrosion
- *Cooking grid manufactured from cast iron
- *Indirectly heated, heating elements can be tilted out
- *2 Independently controlled cooking zones
- *Equipped with stainless steel pilot burner with piezoelectric ignition.
- *Gas distribution by a safety valve with thermocouple.
- *Continuous heating regulation

900 series

Gas Lava Rock Grill With Cabinet


- *All stainless steel construction, manufactured in accordance with the European Standards.
- *Cooking grid manufactured from cast iron, unique technology makes it lighter than usual making.
- *Gas distribution by a safety valve with thermocouple.
- *Continuous heating regulation.
- *All components can be easily disassembled for regular operations of maintenance and cleaning.



FELG0707GC



FELG0809GC

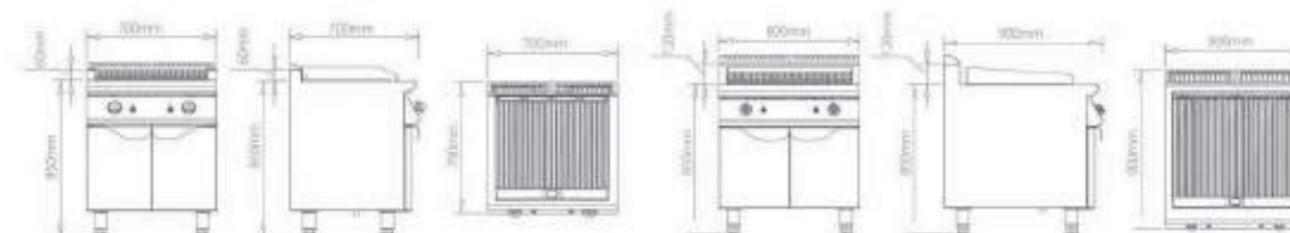

FELG0707GC

700 Series Gas Lava Rock Grill With Cabinet

Dimension	700 x 700 x 850+60mm
Power	14KW
Net Weight	106KG
Grill Size	525 x 600mm
Inlet Size	3/4" (Ø25mm)
LPG Pressure	2800pa
LPG Consumption	1.006 KG/h
NG Pressure	2000pa
NG Consumption	1.48 m3/h

*With fire observation hole. *Italy PEL valve or Taiwan ALPHA valve with CE certification.


FELG0809GC

900 Series Gas Lava Rock Grill With Cabinet

Dimension	800 x 900 x 850+120mm
Power	23KW
Net Weight	144KG
Grill Size	585 x 700mm
Inlet Size	3/4" (Ø25mm)
LPG Pressure	2800pa
LPG Consumption	1.65 KG/h
NG Pressure	2000pa
NG Consumption	2.44 m3/h

*With fire observation hole. *Italy PEL valve or Taiwan ALPHA valve with CE certification.

Electric Grill

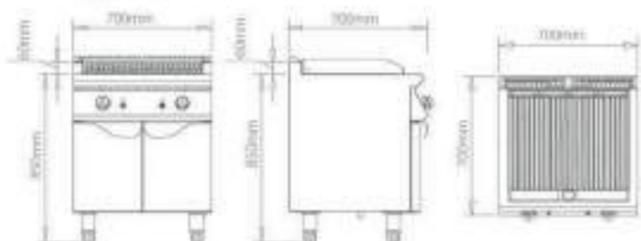


FELG0707EC

700 Series
Electric Grill With Cabinet

Dimension	700 x 700 x 850+60mm
Power	9KW
Voltage	380V/50Hz
Net Weight	123kg

*Countertop Material:Stainless Steel304,2.0
*German EGO Thermostat

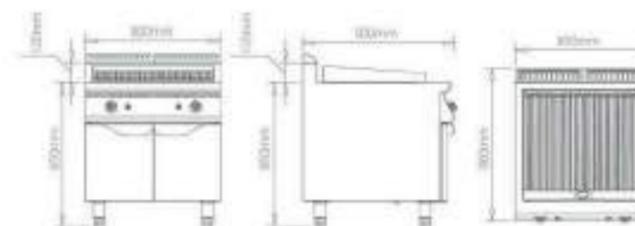


FELG0809EC

900 Series
Electric Grill With Cabinet

Dimension	800*900*850+120mm
Power	12KW
Voltage	380V/50Hz
Net Weight	160kg

*Countertop Material:Stainless Steel304,2.0
*German EGO Thermostat

Fryer

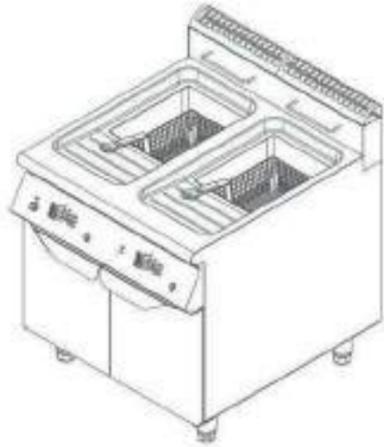

Safety operation

Built-in heat element. Safe operation with the cover and plastic coated heat resistant handles.



700/900 series Gas / Electric Fryer

900 Series Gas 2-Tank Fryer With Cabinet

900 Series Electric 2-Tank 2-Basket Fryer With Cabinet

The Series fryers have thermostatic temperature control in the temperature range. A safety thermostat and drainage tap to make it easier to clean the machine.

Gas deep fryer: Cast iron burners. Automatic burner ignition by means of an electromagnetic valve, with pilot light and thermocouple.

Electric deep fryer: Shielded heating elements in stainless steel. Pilot light to indicate heating. Control by thermostat.



700 Series Gas 2-Tank 2-Basket Fryer With Cabinet

700 Series Electric 2-Tank 2-Basket Fryer With Oven

Standard with stainless steel tank, front, sides and splashback

Two twin-plated, mesh fry baskets with plastic coated, heat resistant handles

Regulation by thermostat; protection against overheating

Full pot drain valve to eliminate clogs


100% safety shut-off



Fryer



- *Regulation by thermostat; protection against overheating
- *Dual-tank with 2 baskets, reasonable design for oil saving
- *Meet the hygiene requirements

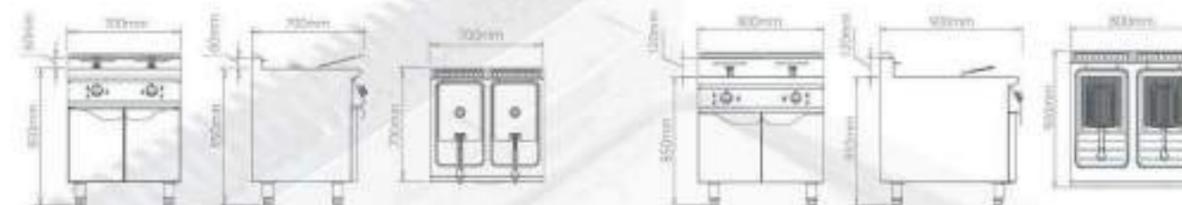

FEFR0707GC

700 Series
Gas 2-Tank 2-Basket Fryer With Cabinet

Dimension	700 x 700 x 850+60mm
Power	31KW
Voltage	/
Net Weight	90KG
Fry Basket Size	280 x 110 x 130mm x 2 baskets
Oil Tank Capacity	(14L-16L) x 2
Temperature	30~200°C
LPG Pressure	2800pa
LPG Consumption	1.581 KG/h
NG Pressure	2000pa
NG Consumption	3.175 m3/h

*Taiwan ALPHA valve with CE certification.
*With gas leakage protection

FEFR0809GC

900 Series
Gas 2-Tank 2-Basket Fryer With Cabinet

Dimension	800 x 900 x 850+120mm
Power	31KW
Voltage	/
Net Weight	117KG
Fry Basket Size	320 x 130 x 130mm x 2 baskets
Oil Tank Capacity	(17L-20L) x 2
Temperature	30~200°C
LPG Pressure	2800pa
LPG Consumption	2.228 KG/h
NG Pressure	2000pa
NG Consumption	3.28 m3/h

*Italy PEL valve or Taiwan ALPHA valve with CE certification.
*With gas leakage protection

FEFR0707EC

700 Series
Electric 2-Tank 2-Basket Fryer With Cabinet

Dimension	700 x 700 x 850+60mm
Power	24KW
Voltage	380V/50Hz
Net Weight	66.5KG
Fry Basket Size	280 x 110 x 130mm x 2 baskets
Oil Tank Capacity	(18L-20L) x 2
Temperature	30~190°C
LPG Pressure	/
LPG Consumption	/
NG Pressure	/
NG Consumption	/

*The heater and control with CE certification.
*The water well is made by completely SUS 304, 1.2mm, completely welding style

FEFR0809EC

900 Series
Electric 2-Tank 2-Basket Fryer With Cabinet

Dimension	800 x 900 x 850+120mm
Power	24KW
Voltage	380V/50Hz
Net Weight	82KG
Fry Basket Size	310 x 130 x 130mm x 2 baskets
Oil Tank Capacity	(20L-23L) x 2
Temperature	30~190°C
LPG Pressure	/
LPG Consumption	/
NG Pressure	/
NG Consumption	/

*The heater and control with CE certification

Pasta Cooker

700 / 900 Series Gas Pasta Cooker With Cabinet
700 / 900 Series Electric Pasta Cooker With Cabinet

High efficiency heating element

The classic mechanical pasta cooker with high performance heating element, speed cooking.



700/900 series Gas/Electric Pasta Cooker

900 Series Gas Pasta Cooker With Cabinet
900 Series Electric Pasta Cooker With Cabinet

700 Series Gas Pasta Cooker With Cabinet

700 Series Electric Pasta Cooker With Cabinet

- *Deep drawn safety rim to prevent foam from overflow
- *Step switching with 3 heating levels, protection against overheating
- *High efficiency design
- *Perforated basket support plate
- *Full pot drain valve to eliminate clogs

- *Worktop in stainless steel.
- *Pressed basin with large rounded edges completely made in stainless steel.
- *Water circulation guaranteed by a drilled bottom that ensures the baskets kept away from the basin base.
- *Full pot drain valve to eliminate clogs.



Pasta Cooker



FEPC0707GC







FEPC0908GC



FEPC0707EC



FEPC0809EC

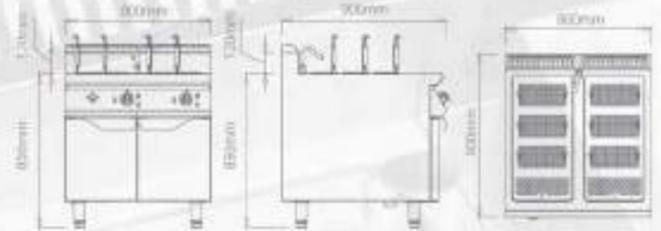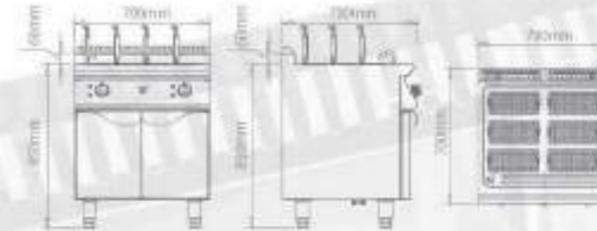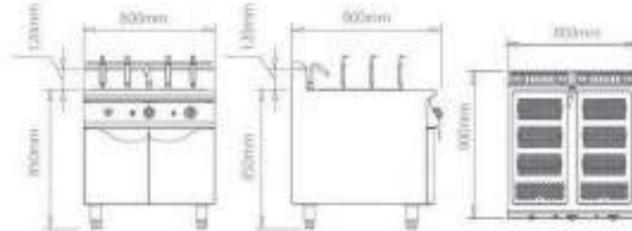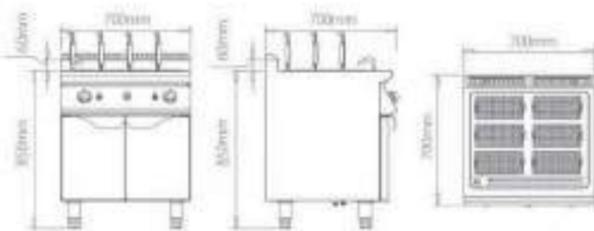

FEPC0707GC

700 Series
Gas Pasta Cooker With Cabinet

FEPC0809GC

900 Series
Gas Pasta Cooker With Cabinet

FEPC0707EC

700 Series
Electric Pasta Cooker With Cabinet

FEPC0809EC

900 Series
Electric Pasta Cooker With Cabinet

Dimension	700 x 700 x 850+60mm	800 x 900 x 850+120mm	700 x 700 x 850+60mm	800 x 900 x 850+120mm
Power	15KW	34KW	12KW	18KW
Net Weight	78.5KG	100.5KG	69KG	84.5KG
Voltage	/	/	380V/50Hz	380V/50Hz
Inlet Size	3/4" (Ø25mm)	3/4" (Ø25mm)	3/4" (Ø25mm)	3/4" (Ø25mm)
Italy Basket Size	130x260x120mmx6pcs	130x260x120mmx6pcs	130x260x120mmx6pcs	130x260x120mmx6pcs
LPG Pressure	2800 pa	2800 pa	/	/
LPG Consumption	0.934 KG/h	1.078 KG/h	/	/
NG Pressure	2000pa	2000pa	/	/
NG Consumption	1.376 m3/h	1.587 m3/h	/	/

*Italy PEL valve or Taiwan ALPHA valve with CE certification.

*The heater and control with CE certification

*The water well is made by SUS 304, 1.2mm completely welding tank

Hot Plate Cooker

700 series

Electric 4-Hot Plate Cooker With Cabinet


- *Round plate, individual control.
- *Large heating surface; free pot sliding without tilting.
- *Excellent heat accumulation means exploitation of remaining heat and sturdy heat supply.
- *Energy saving mode by temperature limit switch.



900 series

Electric 4-Hot Plate Cooker With Oven

- *In the 900 series, the heating elements are hermetically sealed to the working top and controlled by 3-position switches.

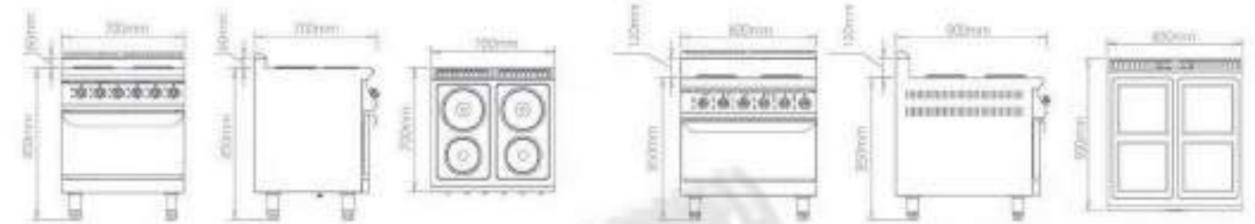

FEER0707EO

700 Series Electric 4-Hot Plate Cooker With Oven

Dimension	700 x 700 x 850+60mm
Power	14KW
Voltage	380V/50Hz
Net Weight	94.5KG
Electric Potential Range	1- 3 degree
Oven Inside Dimension	550 x 570 x 250mm
Oven Power	4.8KW

FEER0809EO

900 Series Electric 4-Hot Plate Cooker With Oven

Dimension	800 x 900 x 850+120mm
Power	20.8KW
Voltage	380V/50Hz
Net Weight	144KG
Electric Potential Range	1- 6 degree
Oven Inside Dimension	550 x 680 x 290mm
Oven Power	4.8KW

*German EGO hotplate

*The heater and control with CE certification.

Bain Marie

700 series

Electric Bain Marie With Cabinet

- *Heating quickly, high efficiency, excellent thermal insulation
- *Selected high-quality stainless steel, anti-corrosion
- *Full pot drain valve to eliminate clogs



900 series

Electric Bain Marie With Cabinet

- *Worktop in stainless steel. Incoloy stainless steel heating elements positioned out of the basin.
- *Electronic regulation of power.
- *Large stainless steel basin to facilitate cleaning operations.
- *Front drain cock with safety system to avoid accidental opening.



FEBM0707EC

700 Series Electric Bain Marie With Cabinet

Dimension	700 x 700 x 850+60mm
Power	4KW
Voltage	380V/50Hz
Temperature Range	30-85°C
Pans	1/4x6" GN pansx5pcs
Net Weight	57.5KG

FEBM0809EC

900 Series Electric Bain Marie With Cabinet


Dimension	800 x 900 x 850+120mm
Power	5KW
Voltage	380V/50Hz
Temperature Range	30-85°C
Pans	1/2x6" GN pansx2pcs, 1/4x6" GN pansx4pcs
Net Weight	76.5KG

*The heater and control with CE certification
*The water well is made by completely SUS 304, 1.2mm, completely welding style



Tilting Braising Pan

900 series

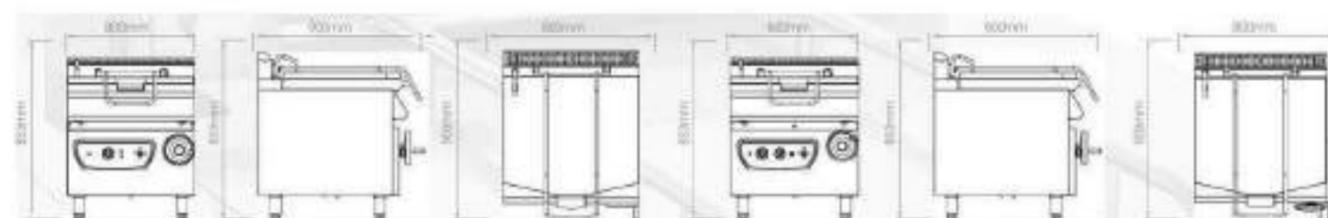

FETB0809E

900 Series
Electric Tilting Braising pan

Dimension	800x900x850+120mm
Power	12KW
Voltage	380V/50Hz
Pan Size	710x660x200mm
Temperature Range	30~300°C
LPG Pressure	/
LPG Consumption	/
NG Pressure	/
NG Consumption	/
Net Weight	140KG

FETB0809G

900 Series
Gas Tilting Braising pan


Dimension	800x900x850+120mm
Power	19KW
Voltage	/
Pan Size	710x660x200mm
Temperature Range	30~300°C
LPG Pressure	2800pa
LPG Consumption	1.80KG/h
NG Pressure	2000pa
NG Consumption	2.65m ³ /h
Net Weight	140KG

*Italy PEL valve or Taiwan ALPHA valve with CE certification. *Italy PEL valve or Taiwan ALPHA valve with CE certification.



Soup Kettle

900 series

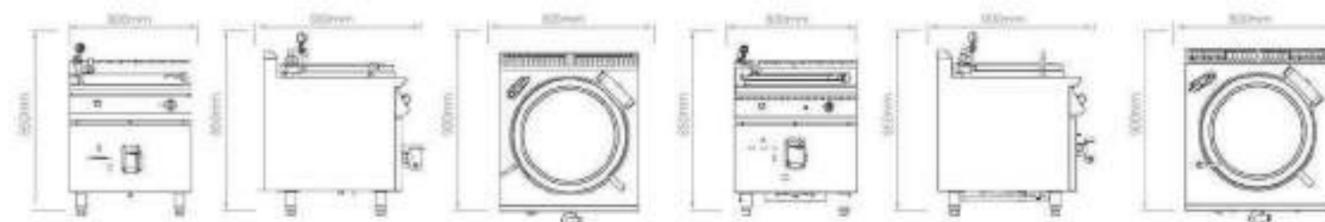

FEBP0809E

900 Series Electric Soup Kettle

Dimension	800x900x850+120mm
Power	24KW
Voltage	380V/50Hz
Capacity	130L
LPG Pressure	/
LPG Consumption	/
NG Pressure	/
NG Consumption	/
Net Weight	140KG

FEBP0809G

900 Series Gas Soup Kettle

Dimension	800x900x850+120mm
Power	20KW
Voltage	/
Capacity	130L
LPG Pressure	2800pa
LPG Consumption	1.44KG/h
NG Pressure	2000pa
NG Consumption	2.12m ³ /h
Net Weight	140KG



China Wok

with Cabinet / 900 Series



FEWO0809GC

900 Series China Wok With Cabinet

Dimension	800 x 900 x 850+120mm
Power	15.8kw/53905BTU
Net Weight	99kg
Gross Weight	143.5kg
LPG Pressure	2800pa
LPG Consumption	0.8kg/h
NG Pressure	2000pa
NG Consumption	1.2m ³ /h
Countertop Material	Stainless Steel 304,2.0
	*High quality adjustable feet




Work Table with Cabinet

Work Table with Cabinet

700/900 Series Work Table With Cabinet

Same altitude and profundity with 700 series or 900 series, perfectly combination, providing available space for cooking.

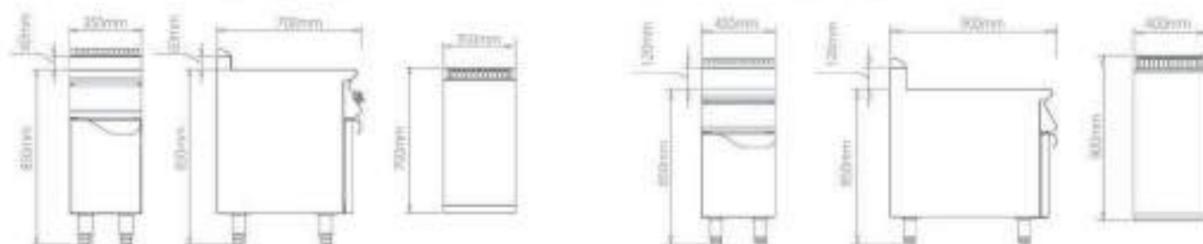

FENE0307NC

700 Series
Work Table With Cabinet

FENE0409NC

900 Series
Work Table With Cabinet

Dimension	350 x 700 x 850+60mm
Net Weight	32.5KG

Dimension	400 x 900 x 850+120mm
Net Weight	42KG

*High quality adjustable feet *Europe style design.

Heated Holding Cabinet

Upright Heated Holding Cabinet with 1/2 Doors

- *Furnotel heated holding cabinet, all in stainless steel construction.
- *Built-in insulated control panel and thermometer.
- *Ventilated heating unit consisting of an AISI 304 stainless steel sheet casing containing a powered fan and heating element.
- *Upright style contains one-door and and double-door, capacity up to 11 layers and 22 layers.






FCHT11G12B

12 Layers 2-Glass Door
Hot Cabinet

Dimension	730 x 940 x 1860mm
Power	2.6kW
Voltage	230V/50Hz
Temperature Range	30-85°C
Grid size	636 x 530mm
Pan Size	2/1GN 65mm
Capacity	12 Layers

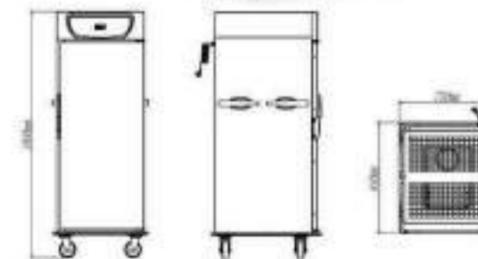

FCCT01S10B

10 Layers 1-Door
Cold Cabinet

Dimension	730 x 840 x 1860mm
Power	380W
Voltage	230V/50Hz
Temperature Range	-2-8°C
Grid size	636 x 530mm
Pan Size	2/1GN 100mm
Capacity	10 Layers



Bain Marie Buffet Fridge/Trolley



FCCT02S3A

3 Pans Bain Marie Buffet Fridge

Dimension	1200 x 700 x 850mm
Pan	3 x GN1/1 x 150mm
Voltage	220V-240V/50Hz
Power	285W
Compressor	Embraco
Refrigerant	R134a
Temperature Range	-5°C~5°C
Net Weight	82kg
Gross Weight	90kg
Material	Stainless Steel 304



FCHT02S3A

3 Pans Bain Marie Buffet Trolley

Dimension	1200 x 700 x 850mm
Pan	3 x GN1/1 x 100mm
Voltage	220-240V~50Hz
Power	1500W
Temperature Range	30°C~70°C
Net Weight	50kg
Gross Weight	55kg
Material	Stainless Steel 304



“The modular and refined design, comes from standard of commercial kitchen.”

A combination of performance and functionality.

Focus on food service

Every function, craft for each detail, are all for cooking food to its best condition.



Gas Range with Burners



Dual protection design

Equipped with flame failure protection and thermocouple protection device.



Cast iron burner

Cast iron burner, black painted, low-pressure regulating valves are used.



Easy operation

The shape and inclination of the knobs make it easy to use and read.



Smooth surface

The one stretch forming worktop, so smooth can be completely cleaned.

X Series Counter Top Gas Range with Burners

Counter Top Gas Range with 4 Burners
Counter Top Gas Range with 6 Burners

- * Made of high-quality stainless steel, corrosion resistant and easy cleaning
- * Four or six burners, made by precision forging
- * Extremely low emission values, high efficiency
- * Complete combustion ensures high heat efficiency and reduces fumes
- * Equipped with flame failure protection and thermocouple protection device, dual protection design


X series is a small and variably combinable kitchen system. The new series of appliance with professional cooking technology is particularly suitable for the constantly increasing snack sector, for example snack bar or fast food chains and bakeries.

X series features the proven cooking technology of the Furnotel's 700&800 series at a counter top design of only 400mm high. All the appliance combinations are available with open cabinets or stands for perfectly connection.



Gas Range with Burners

- * Made of high-quality stainless steel, corrosion resistant and easy cleaning
- * Four burners, pot support made by precision forging
- * Extremely low emission values, high efficiency
- * Stainless steel open cabinet/stand, quick fit connection for the machine

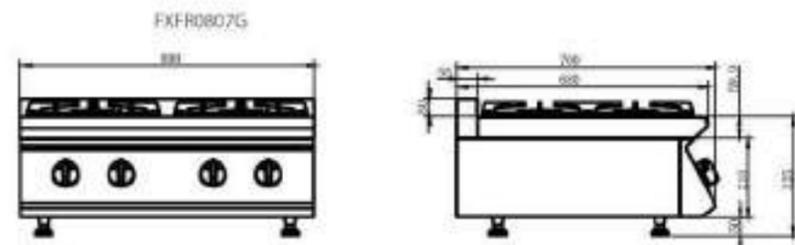

FXFR0807G

X Series
Gas Range 4-Burner

Dimension	800x700x325+50mm
Power	10KW
Material	Stainless Steel 304
Gas Type	NG/LPG
LPG Pressure	2800pa
LPG Consumption	1.453kg/h
NG Pressure	2000pa
NG Consumption	2.223m3/h



Griddle



Evenly heat distribution
Divide into flat and grooved area,
independent temperature control.



X Series Counter Top Gas/ Electric Griddle

Gas Griddle with Four Controls

- * Made of high-quality stainless steel, corrosion resistant and easy cleaning
- * Chrome-plated griddle surface, grooved/flat griddle surface
- * 2 independently controlled cooking zones, with backsplash
- * The welded griddle plate is solid and firm and can be completely cleaned
- * Efficient heat transfer throughout the cooking area
- * Detachable griddle board, easy cleaning
- * Slightly sloped working surface, convenient for sauce cleaning

FXGD0807G

X Series Gas Griddle

Dimension	800x700x325+50mm
Power	9kw
Material	Stainless Steel 304
Gas Type	NG/LPG
LPG Pressure	2800pa
LPG Consumption	0.862kg/h
NG Pressure	2000pa
NG Consumption	1.269m ³ /h



Griddle with Open Cabinet/Stand





- * Efficient heat transfer throughout the cooking area
- * Detachable griddle board, easy cleaning
- * Slightly sloped working surface, convenient for sauce cleaning
- * Made of high-quality stainless steel, corrosion resistant and easy cleaning
- * Chrome-plated griddle surface, grooved/flat griddle surface
- * The welded griddle plate is solid and firm and can be completely cleaned



FXGD0807E



FXGD0807G



FXGD0807E

X Series

Electric Griddle

Dimension	800x700x325+50mm
Power	18kw
Voltage	380V-50/60HZ
Material	Stainless Steel 30
Gas Type	NG/LPG
Temperature Range	50°C ~ 190°C

FXGD0807G

X Series

Gas Griddle

Dimension	800x700x325+50mm
Power	9kw
Gas Type	NG/LPG
Material	Stainless Steel 304
LPG Pressure	2800pa
LPG Consumption	0.862kg/h
NG Pressure	2000pa
NG Consumption	1.269m3/h



Lava Rock Grill

Evenly heat distribution

2 or 4 independently controlled cooking zones, evenly heat distribution.



X Series Counter Top Lava Rock Grill

FXLG0807G

X Series
Gas Lava Rock Grill

Dimension	800x700x125+50mm
Power	14kw
Material	Stainless Steel 304
Gas Type	NG/LPG
LPG Pressure	2800pa
LPG Consumption	0.876kg/h
NG Pressure	2000pa
NG Consumption	1.24m ³ /h

Gas Lava Rock Grill (Four Controls)

- * Selected high-quality stainless steel, anti-corrosion
- * Cooking grid manufactured from cast iron, will not deform easily
- * 2 independently controlled cooking zones
- * Gas distribution by a safety valve with thermocouple
- * Equipped with flame failure devices and thermocouple safety devices
- * Features high heat efficiency, energy conservation, low fumes, great safety and reliability

Lava Rock Grill with Open Cabinet/Stand





- * Cooking grid manufactured from cast iron, will not deform easily
- * Gas distribution by a safety valve with thermocouple
- * Stainless steel open cabinet/stand, quick fit connection for the machine



FXLG0807E



FXLG0807G



FXLG0807E

X Series Electric Grill

Dimension	800x700x325+50mm	Dimension	800x700x325+50mm
Power	6kw	Power	14kw
Voltage	380V~50/60HZ	Gas Type	NG/LPG
Material	Stainless Steel 304	Material	Stainless Steel 201

FXLG0807G

X Series Gas Lava Rock Grill

Dimension	800x700x325+50mm	Dimension	800x700x325+50mm
Power	14kw	Power	14kw
Gas Type	NG/LPG	Gas Type	NG/LPG
Material	Stainless Steel 201	Material	Stainless Steel 201
Temperature Range	/	Temperature Range	/
LPG Pressure	2800pa	LPG Pressure	2800pa
LPG Consumption	0.876kg/h	LPG Consumption	0.876kg/h
NG Pressure	2000pa	NG Pressure	2000pa
NG Consumption	1.24m ³ /h	NG Consumption	1.24m ³ /h



Pasta Cooker

High efficiency heating element

The classic mechanical pasta cooker with high performance heating element, speed cooking



X Series Electric/Gas Pasta Cooker

- *Deep drawn safety rim to prevent foam from overflow
- *Step switching with 3 heating levels, protection against overheating
- *High efficiency design
- *perforated basket support plate
- *Pull pot drain valve to eliminate clogs

- * Worktop in stainless steel.
- * Pressed basin with large rounded edges completely made in stainless steel.
- * Water circulation guaranteed by a drilled bottom that ensures the basket kept away from the basin base.
- * Full pot drain valve to eliminate clogs.





Pasta Cooker



FXPC0807E



FXPC0807G



FXPC0807E

X Series
Electric Pasta Cooker

Dimension	800x700x325+50mm	Dimension	800x700x325+50mm
Power	11kw	Power	11kw
Voltage	380V~50/60HZ	Gas Type	NG/LPG
Material	Stainless Steel 304	Material	Stainless Steel 304

Temperature Range	/
LPG Pressure	2800pa
LPG Consumption	0.718kg/h
NG Pressure	2000pa
NG Consumption	1.058m ³ /h

FXPC0807G

X Series
Gas Pasta Cooker

Dimension	800x700x325+50mm
Power	11kw
Gas Type	NG/LPG
Material	Stainless Steel 304
Temperature Range	/
LPG Pressure	2800pa
LPG Consumption	0.718kg/h
NG Pressure	2000pa
NG Consumption	1.058m ³ /h



Fryer

X Series

Counter Top Electric Fryer

- * Standard with stainless steel tank, sides and back splash
- * Two twin-plated, mesh fry basket with plastic coated, heat resistant handles
- * Electronic regulation of power, temperature control from 50 to 190 °C

Counter Top Gas Fryer





- * Standard with stainless steel tank, sides and back splash
- * Two twin-plated, mesh fry basket with plastic coated, heat resistant handles
- * Gas distribution by a safety valve with thermocouple



FXFR0807G



FXFR0807E



FXFR0807E

X Series
Electric 2-Tank 2-Basket Fryer

Dimension
Power
Voltage
Gas Type
Material
Temperature Range
LPG Pressure
LPG Consumption
NG Consumption
NG Pressure
Oil Tank Capacity

800x700x325+50mm
18kw
380V-50/60HZ
/
Stainless Steel 304
50-190 °C
/
/
/
/
5.5L*2

FXFR0807G

X Series
Gas 2-Tank 2-Basket Fryer

800x700x325+50mm
10KW
/
NG/LPG
Stainless Steel 304
/
2800pa
0.73kg/h
2000pa
1.06m3/h
5L*2

Bain Marie

X Series

Counter Top Electric Bain Marie

- * Standard with stainless steel top, basin and cover, rustproof
- * Electronic regulation of power, temperature control from 30 to 85 C
- * Heating quickly, excellent thermal insulation
- * Full pot drain valve to eliminate clogs

Counter Top Gas Bain Marie


- * Standard with stainless steel top, basin and cover, rustproof
- * Heating quickly, excellent thermal insulation
- * Large stainless steel basin to facilitate cleaning operations
- * Gas distribution by a safety valve with thermocouple



FXBM0807G



FXBM0807E

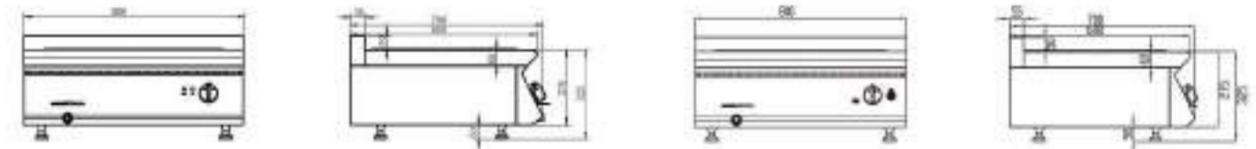

FXBM0807E

X Series
Electric Bain Marie

Dimension	800x700x325+50mm
Power	2.4kw
Voltage	220V-50/60HZ
Gas Type	/
Material	Stainless Steel 304
Temperature Range	30-85 C
LPG Pressure	/
LPG Consumption	/
NG Pressure	/
NG Consumption	/

FXBM0807G

X Series
Gas Bain Marie

Dimension	800x700x325+50mm
Power	8.2kw
Voltage	/
Gas Type	NG/LPG
Material	Stainless Steel 201
Temperature Range	/
LPG Pressure	2800pa
LPG Consumption	0.593kg/h
NG Pressure	2000pa
NG Consumption	0.866m3/h

Hot Plate Cooker

X Series


Electric Hot Plate Cooker

- * Made of high-quality stainless steel, corrosion resistant
- * Round plate, large heating surface
- * Individual control, temperature from 100 to 400 °C
- * Heating elements are hermetically sealed to the working top
- * Excellent heat accumulation means sturdy heat supply
- * Energy saving mode by temperature limit switch
- * With efficient hot plates, this product is very convenient in commercial kitchen




FXER0807E

X Series
Electric 4-Hot Plate Cooker

Dimension	800x700x325+50mm
Power	9.2kw 2*2.6kw+2*2kw
Voltage	380V-50/60HZ
Material	Stainless Steel 304
Temperature Range	100-400 °C



FXER0807E








FXOC0806N

X Series
Open Cabinet

Dimension	790*610*525mm
Material	Stainless Steel 304
Net Weight	21kg
Gross Weight	31kg

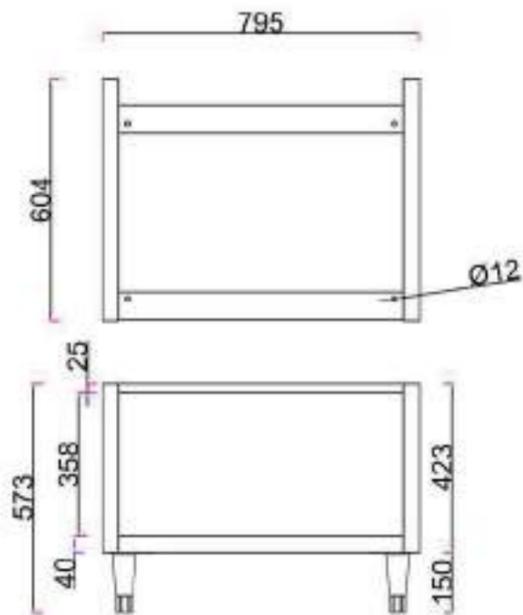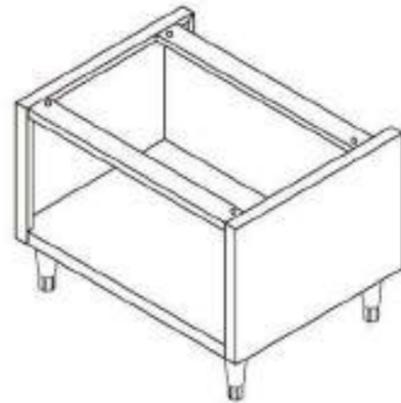

Max Series

Cooked quickly, delicious without waiting

The Max series is a high-power American cooking range that provides healthy food quickly and efficiently.



High Power Burner

Furnotel Max Series' power is 20% over than normal European type, you'll have a experience of fast cooking you never had before, which would supply your business more convenient.



Easy Maintenance

Simple structure makes the maintenance and cleaning simple. You will have less after-sales worries and less troubles while using Furnotel Max Series.



Multi-Combination

We not only have different sizes of each M-Series to fit for different kinds of society catering, but also you can combine our M-Series to make full use of your kitchen space.



Max Series

Countertop Gas Range



Max Series 2-Burner Gas Range



Max Series 4-Burner Gas Range



Max Series 6-Burner Gas Range

	FMGR0307G	FMGR0307G-E
	Max series 2-Burner Gas Range	European Standard 2-Burner Gas Range
Dimensions	308*760*425mm	308*760*425mm
Package Dimensions	410*900*480mm	410*900*480mm
Power	14.6KW/49830BTU	14.6KW/49830BTU
Each Burner Power	7.3 Kw/24915BTU	7.3Kw/24915BTU
Countertop Material	Stainless Steel 304	Stainless Steel 304
Net Weight	24.5kg	24.5kg
Gross Weight	36kg	36kg
Flameout protection	/	✓

	FMGR0607G	FMGR0607G-E
	Max series 4-Burner Gas Range	European Standard 4-Burner Gas Range
Dimensions	610*760*425mm	610*760*425mm
Package Dimensions	710*900*480mm	710*900*480mm
Power	29.2KW/99660BTU	29.2KW/99660BTU
Each Burner Power	7.3 Kw/24915BTU	7.3 Kw/24915BTU
Countertop Material	Stainless Steel 304	Stainless Steel 304
Net Weight	43.5kg	43.5kg
Gross Weight	60kg	60kg
Flameout protection	/	✓

	FMGR0907G	FMGR0907G-E
	Max series 6-Burner Gas Range	European Standard 6-Burner Gas Range
Dimensions	910*760*425mm	910*760*425mm
Package Dimensions	1010*900*480mm	1010*900*480mm
Power	43.8KW/149400BTU	43.8KW/149400BTU
Each Burner Power	7.3 Kw/24915BTU	7.3 Kw/24915BTU
Countertop Material	Stainless Steel 304	Stainless Steel 304
Net Weight	61.5kg	61.5kg
Gross Weight	85.5kg	85.5kg
Flameout protection	/	✓



3 Sizes for options: 12",24",36"

Each burner power:7.3Kw(24915BTU)

Heavy duty cast iron burner frame

High-quality anti-corrosion 304 stainless steel

Full size waste tray

Wide front board fast cooling down

Adjustable stainless steel antiskid feet

Gas types: NG,LPG



Max Series Countertop Gas Griddle

4 sizes for options: 24", 36", 48", 60"

Each burner power: 8.8Kw(30034BTU)

12"(30cm) U-shape burner

Griddle board thickness: 1"(25mm)

High-quality anti-corrosion 304 stainless steel

Fast cooling down function of wild front board

Adjustable stainless steel antiskid feet

3.25"(82mm) width oil drip box with oil spill hole & inner stopper board

Gas types: NG, LPG



Max Series Countertop 24" Gas & Electric Griddle



Max Series Countertop 36" Gas & Electric Griddle

	FMGD0907G	FMGD0907G-E	FMGD0907GT	FMGD0907GT-E	FMGD1207E
	Max series 36" Gas Griddle	European Standard 36" Gas Griddle	Max series 36" Gas Griddle With Thermostat	European Standard 36" Gas Griddle With Thermostat	Max series 36" Electric Griddle With Thermostat
Dimensions	910*760*425mm	910*760*425mm	910*760*425mm	910*760*425mm	910*760*425mm
Package Dimensions	1010*900*530mm	1010*900*530mm	1010*900*530mm	1010*900*530mm	1010*900*530mm
Power	26.4KW/90103BTU	26.4KW/90103BTU	26.4KW/90103BTU	26.4KW/90103BTU	10Kw
Each Burner Power	8.8 Kw/30034BTU	8.8 Kw/30034BTU	8.8 Kw/30034BTU	8.8 Kw/30034BTU	/
Countertop Material					
Net Weight	100kg	100kg	100kg	100kg	100kg
Gross Weight	129kg	129kg	129kg	129kg	129kg
Flameout protection	/	✓	/	✓	/
Temperature Range	/	/	95-288°C	95-288°C	150-450°C



Max Series Countertop 48" Gas & Electric Griddle

	FMGD1207G	FMGD1207G-E	FMGD1207GT	FMGD1207GT-E	FMGD1207E
	Max series 48" Gas Griddle	European Standard 48" Gas Griddle	Max series 48" Gas Griddle With Thermostat	European Standard 48" Gas Griddle With Thermostat	Max series 48" Electric Griddle With Thermostat
Dimensions	1210*760*425mm	1210*760*425mm	1210*760*425mm	1210*760*425mm	1210*760*425mm
Package Dimensions	1310*900*530mm	1310*900*530mm	1310*900*530mm	1310*900*530mm	1310*900*530mm
Power	35.2KW/120138BTU	35.2KW/120138BTU	35.2KW/120138BTU	35.2KW/120138BTU	13.5kw
Each Burner Power	8.8 Kw/30034BTU	8.8 Kw/30034BTU	8.8 Kw/30034BTU	8.8 Kw/30034BTU	/
Countertop Material					
Net Weight	126kg	126kg	126kg	126kg	126kg
Gross Weight	161kg	161kg	161kg	161kg	161kg
Flameout protection	/	✓	/	✓	/
Temperature Range	/	/	95-288°C	95-288°C	150-450°C

	FMGD0607G	FMGD0607G-E	FMGD0607GT	FMGD0607GT-E	FMGD0607E
	Max series 24" Gas Griddle	European Standard 24" Gas Griddle	Max series 24" Gas Griddle With Thermostat	European Standard 24" Gas Griddle With Thermostat	Max series 24" Electric Griddle With Thermostat
Dimensions	610*760*425mm	610*760*425mm	610*760*425mm	610*760*425mm	610*760*425mm
Package Dimensions	710*900*530mm	710*900*530mm	710*900*530mm	710*900*530mm	710*900*530mm
Power	17.6KW/60069BTU	17.6KW/60069BTU	17.6KW/60069BTU	17.6KW/60069BTU	6.75Kw
Each Burner Power	8.8 Kw/30034BTU	8.8 Kw/30034BTU	8.8 Kw/30034BTU	8.8 Kw/30034BTU	/
Countertop Material	Stainless Steel 304	Stainless Steel 304	Stainless Steel 304	Stainless Steel 304	Stainless Steel 304
Net Weight	71kg	71kg	71kg	71kg	70kg
Gross Weight	92kg	92kg	92kg	92kg	89kg
Flameout protection	/	✓	/	✓	/
Temperature Range	/	/	95-288°C	95-288°C	150-450°C

Max Series Gas Charbroiler



Max series 24 " Gas Charbroiler

FMLG0607G

Max series 24 " Gas Charbroiler

Dimensions	610*760*425mm	610*760*425mm
Package Dimensions	710*900*530mm	710*900*530mm
Power	20.6KW/70308BTU	20.6KW/70308BTU
Each Burner Power	10.3 Kw/35154BTU	10.3 Kw/35154BTU
Countertop Material	Stainless Steel 304	Stainless Steel 304
Net Weight	52kg	52kg
Gross Weight	70kg	70kg
Flameout protection	/	✓

FMLG0607G-E

European Standard 24 " Gas Charbroiler



4 sizes for options: 24", 36", 48", 60"

Each burner power: 8.8Kw(30034BTU)

12"(30cm) U-shape burner

Griddle board thickness: 1"(25mm)

High-quality anti-corrosion 304 stainless steel

Fast cooling down function of wild front board

Adjustable stainless steel antiskid feet

3.25"(82mm) width oil drip box with oil spill hole & inner stopper board

Gas types: NG, LPG



FMLG0907G

Max series 36 " Gas Charbroiler

Dimensions	910*760*425mm	910*760*425mm
Package Dimensions	1010*900*530mm	1010*900*530mm
Power	30.9KW/105462BTU	30.9KW/105462BTU
Each Burner Power	10.3 Kw/35154BTU	10.3 Kw/35154BTU
Countertop Material	Stainless Steel 304	Stainless Steel 304
Net Weight	70kg	70kg
Gross Weight	96.5kg	96.5kg
Flameout protection	/	✓

FMLG0907G-E

European Standard 36 " Gas Charbroiler



Max series 36 " Gas Charbroiler

FMLG1207G

Max series 48 " Gas Charbroiler

Dimensions	1210*760*425mm	1210*760*425mm
Package Dimensions	1310*900*530mm	1310*900*530mm
Power	41.2KW/140616BTU	41.2KW/140616BTU
Each Burner Power	10.3 Kw/35154BTU	10.3 Kw/35154BTU
Countertop Material	Stainless Steel 304	Stainless Steel 304
Net Weight	104kg	104kg
Gross Weight	126kg	126kg
Flameout protection	/	✓

FMLG1207G-E

European Standard 48 " Gas Charbroiler



Max series 48 " Gas Charbroiler



Max Series Gas Fryers



Max Series Gas 1-Tank 2-Basket Fryer

	FMFR0408G	FMFR0408G-E	FMFR0408GT
	Max Series Gas 1-Tank 2-Basket Fryer	European Standard Gas 1-Tank 2-Basket Fryer	Max series Gas 1-Tank 2-Basket Fryer With Thermostat
Dimensions	394*825*1220mm	394*825*1220mm	394*825*1220mm
Package Dimensions	420*880*850mm	420*880*850mm	420*880*850mm
Power	35.2KW/1201388BTU	35.2KW/1201388BTU	35.2KW/1201388BTU
Each Burner Power	8.8Kw/30034BTU	8.8Kw/30034BTU	8.8Kw/30034BTU
Oil Tank Capacity	22L	22L	22L
Temperature Range	0-205°C	0-205°C	0-205°C
Countertop Material	Stainless Steel 304	Stainless Steel 304	Stainless Steel 304
Net Weight	63kg	63kg	63kg
Gross Weight	85.5kg	85.5kg	85.5kg
Flameout protection	/	✓	/



Max Series Gas 2-Tank 2-Basket Fryer

	FMFR0508G	FMFR0508G-E
	Max Series Gas 1-Tank 2-Basket Fryer	European Standard Gas 2-Tank 2-Basket Fryer
Dimensions	533*825*1220mm	533*825*1220mm
Package Dimensions	570*880*850mm	570*880*850mm
Power	44KW/1501728BTU	44KW/1501728BTU
Each Burner Power	8.8Kw/30034BTU	8.8Kw/30034BTU
Oil Tank Capacity	36L	36L
Temperature Range	0-205°C	0-205°C
Countertop Material	Stainless Steel 304	Stainless Steel 304
Net Weight	83kg	83kg
Gross Weight	95kg	95kg
Flameout protection	/	✓



Each burner power: 8.8Kw (30034BTU)

Efficient heat exchange fire pipe

Temperature range 100°C-205°C

High-quality anti-corrosion 304 stainless steel

Large capacity for oil cooling area

With 32mm oil drainer, safe & fast oil draining

Large size stainless steel adjusting feet, optional caster

Firmly-welded oil tank, with sand blasting surface

With extension tube to drain oil, easy to operation

Heat-resistant & anti-corrosion nickel basket

Flame failure protection device

Automatic reset of overheating protection

Gas types: NG, LPG



Max Series

Gas Range With Oven



Max Series 4-Burner Gas Range With Oven

FMGR0608GO

Max Series 4-Burner Gas Range With Oven

Dimensions	610*820*1500mm	610*820*1500mm
Package Dimensions	700*970*1110mm	700*970*1110mm
Power	40.2KW/137203BTU	40.2KW/137203BTU
Burner Power	8Kw*4	8Kw*4
Oven Power	8.2Kw	8.2Kw
Oven Temperature	0-260°C	0-260°C
Countertop Material	Stainless Steel 304	Stainless Steel 304
Material Thickness	1.5mm	1.5mm
Flameout protection	/	✓

FMGR0608GO-E

European Standard 4-Burner Gas Range With Oven



Max Series 8-Burner Gas Range With Oven

FMGR1208GO

Max Series 8-Burner Gas Range With Oven

Dimensions	1211*820*1500mm	1211*820*1500mm
Package Dimensions	1300*970*1110mm	1300*970*1110mm
Power	72.2Kw/246418BTU	72.2Kw/246418BTU
Burner Power	8Kw*8	8Kw*8
Oven Power	8.2Kw*2	8.2Kw*2
Oven Temperature	0-260°C	0-260°C
Countertop Material	Stainless Steel 304	Stainless Steel 304
Material Thickness	1.5mm	1.5mm
Gross Weight	292kg	292kg
Flameout protection	/	✓

FMGR1208GO-E

European Standard 8-Burner Gas Range With Oven

FMGR0908GO

Max Series 6-Burner Gas Range With Oven

Dimensions	914*820*1500mm	914*820*1500mm
Package Dimensions	1000*970*1110mm	1000*970*1110mm
Power	56.2KW/191811BTU	56.2KW/191811BTU
Burner Power	8Kw*6	8Kw*6
Oven Power	8.2Kw	8.2Kw
Oven Temperature	0-260°C	0-260°C
Countertop Material	Stainless Steel 304	Stainless Steel 304
Material Thickness	1.5mm	1.5mm
Net Weight	165kg	165kg
Gross weight	212kg	212kg
Flameout protection	/	✓

FMGR0908GO-E

European Standard 6-Burner Gas Range With Oven



Max Series 10-Burner Gas Range With Oven

FMGR1508GO

Max Series 10-Burner Gas Range With Oven

Dimensions	1524*820*1500mm	1524*820*1500mm
Package Dimensions	1600*970*1110mm	1600*970*1110mm
Power	96.4Kw/329013BTU	96.4Kw/329013BTU
Burner Power	8Kw*10	8Kw*10
Oven Power	8.2Kw*2	8.2Kw*2
Oven Temperature	0-260°C	0-260°C
Countertop Material	Stainless Steel 304	Stainless Steel 304
Material Thickness	1.5mm	1.5mm
Flameout protection	/	✓

FMGR1508GO-E

European Standard 10-Burner Gas Range With Oven

Max Series Combination Gas Range



Max Series 24 " Gas Griddle With Oven

FMGD0608GO

Max series 24 " Gas Griddle With Oven

Dimensions	610*820*1500mm	610*820*1500mm
Package Dimensions	700*970*1190mm	700*970*1190mm
Power	24.2KW/82595BTU	24.2KW/82595BTU
Griddle Power	8Kw*2	8Kw*2
Oven Power	8.2Kw	8.2Kw
Oven Temperature	0-260°C	0-260°C
Countertop Material	Stainless Steel 304	Stainless Steel 304
Material Thickness	1.5mm	1.5mm
Flameout protection	/	✓

FMGD0608GO-E

European Standard 24 " Gas Griddle With Oven



Max Series 36 " Gas Griddle With Oven

FMGD0908GO

Max series 36 " Gas Griddle With Oven

Dimensions	914*820*1500mm	914*820*1500mm
Package Dimensions	1000*970*1190mm	1000*970*1190mm
Power	32.2KW/109897BTU	32.2KW/109897BTU
Griddle Power	8Kw*3	8Kw*3
Oven Power	8.2Kw	8.2Kw
Oven Temperature	0-260°C	0-260°C
Countertop Material	Stainless Steel 304	Stainless Steel 304
Material Thickness	1.5mm	1.5mm
Flameout protection	/	✓

FMGD0908GO-E

European Standard 36 " Gas Griddle With Oven



Max Series 24 " Gas Charbroiler With Oven

FMLG0608GO

Max Series 24 " Gas Charbroiler With Oven

Dimensions	610*820*1500mm	610*820*1500mm
Package Dimensions	700*970*1190mm	700*970*1190mm
Power	28.8KW/98295BTU	28.8KW/98295BTU
Burner Power	10.3KW*2	10.3KW*2
Oven Power	8.2Kw	8.2Kw
Oven Temperature	0-260°C	0-260°C
Countertop Material	Stainless Steel 304	Stainless Steel 304
Material Thickness	1.5mm	1.5mm
Flameout protection	/	✓

FMLG0608GO-E

European Standard 24 " Gas Charbroiler With Oven



Max Series 36 " Gas Charbroiler With Oven

FMLG0908GO

Max Series 36 " Gas Charbroiler With Oven

Dimensions	914*820*1500mm	914*820*1500mm
Package Dimensions	1000*970*1190mm	1000*970*1190mm
Power	39.1KW/133448BTU	39.1KW/133448BTU
Burner Power	10.3KW*3	10.3KW*3
Oven Power	8.2Kw	8.2Kw
Oven Temperature	0-260°C	0-260°C
Countertop Material	Stainless Steel 304	Stainless Steel 304
Material Thickness	1.5mm	1.5mm
Flameout protection	/	✓

FMLG0908GO-E

European Standard 36 " Gas Charbroiler With Oven



Max Series 2-Burner Gas Range + 24 " Gas Griddle With Oven

FMGR0908GOG

Max series 2-Burner Gas Range + 24 " Gas Griddle With Oven

Dimensions	914*820*1500mm	914*820*1500mm
Package Dimensions	1000*970*1190mm	1000*970*1190mm
Power	40.2KW/137202BTU	40.2KW/137202BTU
Burner Power	8Kw*2	8Kw*2
Griddle Power	8Kw*2	8Kw*2
Oven Power	8.2Kw	8.2Kw
Oven Temperature	0-260°C	0-260°C
Countertop Material	Stainless Steel 304	Stainless Steel 304
Material Thickness	1.5mm	1.5mm
Gross weight	240kg	240kg
Flameout protection	/	✓

FMGR0908GOG-E

European Standard 2-Burner Gas Range + 24 " Gas Griddle With Oven



Max series 2-Burner Gas Range + 24" Gas Charbroiler With Oven

FMGR0908GOL

Max series 2-Burner Gas Range + 24" Gas Charbroiler With Oven

Dimensions	914*820*1500mm	914*820*1500mm
Package Dimensions	1000*970*1190mm	1000*970*1190mm
Power	44.8Kw/152902BTU	44.8Kw/152902BTU
Burner Power	8Kw*2	8Kw*2
Griddle Power	10.3Kw*2	10.3Kw*2
Oven Power	8.2Kw	8.2Kw
Oven Temperature	0-260°C	0-260°C
Countertop Material	Stainless Steel 304	Stainless Steel 304
Materials Thickness	1.5mm	1.5mm
Gross weight	221kg	221kg
Flameout protection	/	✓

FMGR0908GOL-E

European Standard 2-Burner Gas Range + 24" Gas Charbroiler With Oven



Max Series 6-Burner Gas Range & Griddle With Oven

FMGR1508GOG

Max series 6-Burner Gas Range + Griddle With Oven

Dimensions	1524*820*1500mm	1524*820*1500mm
Package Dimensions	1600*970*1190mm	1600*970*1190mm
Power	80.4Kw/274405BTU	80.4Kw/274405BTU
Burner Power	8Kw*6	8Kw*6
Griddle Power	8Kw*2	8Kw*2
Oven Power	8.2Kw*2	8.2Kw*2
Oven Temperature	0-260°C	0-260°C
Countertop Material	Stainless Steel 304	Stainless Steel 304
Materials Thickness	1.5mm	1.5mm
Flameout protection	/	✓

FMGR1508GOG-E

European Standard 6-Burner Gas Range + Griddle With Oven

FMGR1208GOG

Max series 4-Burner Gas Range + 24" Gas Griddle With Oven

Dimensions	1211*820*1500mm	1211*820*1500mm
Package Dimensions	1300*970*1190mm	1300*970*1190mm
Power	72.2Kw/246418BTU	72.2Kw/246418BTU
Burner Power	8Kw*4	8Kw*4
Griddle Power	8Kw*2	8Kw*2
Oven Power	8.2Kw	8.2Kw
Oven Temperature	0-260°C	0-260°C
Countertop Material	Stainless Steel 304	Stainless Steel 304
Materials Thickness	1.5mm	1.5mm
Gross weight	320kg	320kg
Flameout protection	/	✓

FMGR1208GOG-E

European Standard 4-Burner Gas Range + 24" Gas Griddle With Oven



Max series 4-Burner Gas Range + 24" Gas Griddle With Oven



Max Series 6-Burner Gas Range + Charbroiler With Oven

FMGR1508GOL

Max series 6-Burner Gas Range + Charbroiler With Oven

Dimensions	1524*820*1500mm	1524*820*1500mm
Package Dimensions	1600*970*1190mm	1600*970*1190mm
Power	85Kw/290105BTU	85Kw/290105BTU
Burner Power	8Kw*6	8Kw*6
Grill Power	10.3Kw*2	10.3Kw*2
Oven Power	8.2Kw*2	8.2Kw*2
Oven Temperature	0-260°C	0-260°C
Countertop Material	Stainless Steel 304	Stainless Steel 304
Materials Thickness	1.5mm	1.5mm
Flameout protection	/	✓

FMGR1508GOL-E

European Standard 6-Burner Gas Range + Griddle With Oven

FMGR1208GOL

Max series 4-Burner Gas Range + 24" Gas Charbroiler With Oven

Dimensions	1211*820*1500mm	1211*820*1500mm
Package Dimensions	1300*970*1190mm	1300*970*1190mm
Power	60.8Kw/207510BTU	60.8Kw/207510BTU
Burner Power	8Kw*4	8Kw*4
Griddle Power	10.3Kw*2	10.3Kw*2
Oven Power	8.2Kw	8.2Kw
Oven Temperature	0-260°C	0-260°C
Countertop Material	Stainless Steel 304	Stainless Steel 304
Materials Thickness	1.5mm	1.5mm
Gross weight	301kg	301kg
Flameout protection	/	✓

FMGR1208GOL-E

European Standard 4-Burner Gas Range + 24" Gas Charbroiler With Oven



Max series 4-Burner Gas Range + 24" Gas Charbroiler With Oven

3 types for options: Gas Range & Griddle with Oven, Gas Range & Charbroiler with Oven, Gas Range with Oven

High-quality anti-corrosion 304 stainless steel

Enamelled oven bottom plate

Two shelves in the oven

Full size waste tray

Stainless steel adjustable feet, casters for option

Gas types: NG, LPG

Max Series

Gas Convection Oven



Max series Double Deck Electric Convection Oven

FMCO1109EO

Max series Double Deck Electric Convection Oven

Dimensions	1115*967*1744mm
Package Dimensions	1230*1000*1820mm
Volume	418L
Power	20Kw
Oven Temperature	0-260°C
Material	Stainless Steel 304
Materials Thickness	1.5mm
Net Weight	375Kg
Gross Weight	429Kg

- High-quality anti-corrosion 304 stainless steel
- Large double layer glass, anti-heat
- Two-speed high power fan
- Enamelled inner chamber, convenient for cleaning
- 10 adjustable shelf holders
- 5 nickel plated shelves
- Electronic ignition, safe and reliable
- Electronic accurate temperature control
- Manually operating timer
- Temperature: 66 °C-260°C
- Independent cooling fan
- Gas types: NG,LPG



Max Series Electric Convection Oven

FMCO1109E

Max Series Electric Convection Oven

Dimensions	1115*967*1510mm
Package Dimensions	1220*1070*1600mm
Volume	309L
Power	20Kw
Oven Temperature	0-260°C
Material	Stainless Steel 304
Materials Thickness	1.5mm
Net Weight	187.5kg
Gross Weight	228Kg



Max Series Accessories



Max Series Open Cabinet

	FMOC-0306	FMOC-0606	FMOC-0906	FMOC-1206
	300mm Open Cabinet	600mm Open Cabinet	900mm Open Cabinet	1200mm Open Cabinet
Dimensions	304*640*580mm	610*640*580mm	915*640*580mm	1220*640*580mm
Material	Stainless Steel 304	Stainless Steel 304	Stainless Steel 304	Stainless Steel 304



Max Series Stand

	FMSD-0306	FMSD-0606	FMSD-0906	FMSD-1206
	Max Series Stand	Max Series Stand	Max Series Stand	Max Series Stand
Dimensions	304*640*580mm	610*640*580mm	915*640*580mm	1220*640*580mm
Material	Stainless Steel 304	Stainless Steel 304	Stainless Steel 304	Stainless Steel 304



Max Series Towel Shelf

	FMTS-0606	FMTS-0906	FMTS-1206
	Max Series Towel Shelf	Max Series Towel Shelf	Max Series Towel Shelf
Dimensions	601*158*88mm	906*158*88mm	1211*158*88mm
Material	Stainless Steel 304	Stainless Steel 304	Stainless Steel 304



Max Series Sauce Shelf

	FMSS-0606	FMSS-0906	FMSS-1206
	Max Series Sauce Shelf	Max Series Sauce Shelf	Max Series Sauce Shelf
Dimensions	605*208*92mm	910*208*92mm	1215*208*92mm
Material	Stainless Steel 304	Stainless Steel 304	Stainless Steel 304



Refrigeration Equipment

Quality Equipment for professional

Furnotel®

You select the ingredients,
Furnotel keeps its freshness.

The exclusive Furnotel refrigeration technology for any professional requirements.




Chiller and Freezer

Made of quality stainless steel 304, Furnotel Refrigerators & Chillers own the perfect appearance. 70mm thickness high density foam insulation provides excellent thermal insulation performance. Using Dixell Thermostat, high standard in the industry, accurate and exact temperature control, long service time. All with LED light, automatically lights up when door opening.



Rounded Inside Corners

When designing the interior of the machine, Furnotel Chillers and Freezers always seek to a balance between beautiful appearance and convenience for users. Round corners in the compartment is very easy for cleaning.



Air Cooling System

Well punching processing without burrs, gives elegant appearance and ideal ventilation effect. The fan work along with the compressor's on and off, when reach the setting temperature will come into energy saving status.



Independent Cassette Unit

The independent cassette unit increase the body's versatility and to facilitate the after-sales maintenance.



EBM Fan

Fan cooling type, EBM fan imported from Germany to provide long service life.



Dixell Thermostat

Using Dixell Thermostat, high standard in the industry, accurate and exact temperature control, long service time than others.



The Machine Body

Whole product is welding-free design, which can avoid welding and polishing do harm to rust resistance of stainless steel.



Feet/Castors

Stainless steel feet or castors (adjustable feet can change the height over uneven ground, quality castors for easy moving).



Interior

Round corners in the compartment are easy for cleaning. Adjustable shelves can support up to 30 KG.



Door

Special foaming on glass door, with no welding and combining stainless steel door frame. Self-closing against door's failure to close entirely.



Chiller and freezer



FER7483CS100
FER7483FS100



FER7483CS200
FER7483FS200



FER14883CS200
FER14883FS200



FER14883CS400
FER14883FS400



FER14883DS400

FER7483CS100 FER7483FS100 FER7483CS200 FER7483FS200 FER14883CS200 FER14883FS200 FER14883CS400 FER14883FS400 FER14883DS400

1 Door Fancooling Upright Chiller 1 Door Fancooling Upright Freezer 2 Doors Fancooling Upright Chiller 2 Doors Fancooling Upright Freezer 2 Doors Fancooling Upright Chiller 2 Doors Fancooling Upright Freezer 4 Doors Fancooling Upright Chiller 4 Doors Fancooling Upright Freezer 4 Doors Fancooling Double Temperature Upright Freezer

Dimension	740*830*2010mm	740*830*2010mm	740*830*2010mm	740*830*2010mm	1480*830*2010mm	1480*830*2010mm	1480*830*2010mm	1480*830*2010mm	1480*830*2010mm
Capacity	570L	570L	570L	570L	1311L	1311L	1311L	1311L	1311L
Power	360W	690W	360W	690W	600W	1000W	600W	1000W	1000W
Voltage	220-240V~50Hz								
Compressor	Embraco	Secop	Embraco	Secop	Embraco	Embraco	Embraco	Embraco	Embraco
Refrigerant	R134a	R404a	R134a	R404a	R134a	R404a	R134a	R404a	R134a/R404a
Temperature Range	2°C~8°C	-18°C~-22°C	2°C~8°C	-18°C~-22°C	2°C~8°C	-18°C~-22°C	2°C~8°C	-18°C~-22°C	2°C~8°C, -18°C~-22°C
Cooling Type	Ventilated								
Shelves	3	3	3	3	6	6	6	6	6
Net Weight	121kg	123kg	121kg	123kg	198kg	208kg	198kg	208kg	224kg
Gross Weight	130kg	140kg	130kg	140kg	215kg	226kg	215kg	226kg	254kg
Material	Stainless Steel 304								
Thermostat	Dixell								

*High Density Foam Insulation Thickness: 70mm *With LED Light

*High Density Foam Insulation Thickness: 70mm *With LED Light

Chiller and freezer



FER7483CG100
FER7483FG100



FER7483CG200



FER14883CG200
FER14883FG200



FER14883CG400

	FER7483CG100	FER7483FG100	FER7483CG200	FER14883CG200	FER14883FG200	FER14883CG400
	1 Glass Door Fancooling Upright Chiller	1 Glass Door Fancooling Upright Freezer	2 Glass Door Fancooling Upright Chiller	2 Glass Doors Fancooling Upright Chiller	2 Glass Doors Fancooling Upright Freezer	4 Glass Doors Fancooling Upright Chiller
Dimension	740*830*2010mm	740*830*2010	740*830*2010mm	1480*830*2010mm	1480*830*2010mm	1480*830*2010mm
Capacity	550L	550L	550L	1250L	1250L	1250L
Power	400W	274W	400W	777W	1134W	797W
Voltage	220-240V~50/60Hz	220-240V~50Hz	220-240V~50/60Hz	220-240V~50Hz	220-240V~50Hz	220-240V~50Hz
Compressor	Secop	Embraco	Secop	Secop	Embraco	Secop
Refrigerant	R134a	R404a	R134a	R134a	R404a	R134a
Temperature Range	3°C~10°C	-15°C~-20°C	3°C~10°C	3°C~10°C	-15°C~-20°C	3°C~10°C
Cooling Type	Ventilated	Ventilated	Ventilated	Ventilated	Ventilated	Ventilated
Shelves	3	3	3	3	6	6
Net Weight	124kg	134kg	128kg	208kg	219kg	212kg
Gross Weight	138kg	138kg	142kg	232kg	243kg	236kg
Material	Stainless Steel 304	Stainless Steel 304	Stainless Steel 304	Stainless Steel 304	Stainless Steel 304	Stainless Steel 304
Thermostat	Dixell	Dixell	Dixell	Dixell	Dixell	Dixell
*High Density Foam Insulation Thickness: 70mm *With LED Light			*High Density Foam Insulation Thickness: 70mm *With LED Light			

Chiller and freezer



FAR6276CS100 FAR6276FS100



FAR6276CS200 FAR6276FS200



FAR6276CG100 FAR6276FG100

FAR6276CS100

1 Door Fancooling Upright Chiller

FAR6276FS100

1 Door Fancooling Upright Freezer

FAR6276CS200

2 Doors Fancooling Upright Chiller

FAR6276FS200

2 Doors Fancooling Upright Freezer

FAR6276CG100

1 Glass Door Fancooling Upright Chiller

FAR6276FG100

1 Glass Door Fancooling Upright Freezer

Dimension	620*760*1980mm	620*760*1980mm	620*760*1980mm	620*760*1980mm	620*760*1980mm	620*760*1980mm
Capacity	395L	395L	395L	395L	395L	395L
Power	425W	475W	425W	425W	425W	475W
Voltage	220-240V~50Hz	220-240V~50Hz	220-240V~50Hz	220-240V~50Hz	220-240V~50Hz	220-240V~50Hz
Compressor	Embraco	Embraco	Embraco	Embraco	Embraco	Embraco
Thermostat	Carel	Carel	Carel	Carel	Carel	Carel
Cooling Type	Ventilated	Ventilated	Ventilated	Ventilated	Ventilated	Ventilated
Refrigerant	R134A/270G	R404A/320G	R134A/270G	R134A/270G	R134A/298G	R404A/384G
Temperature Range	2~8°C	-15°C~20°C	2°C~8°C	2°C~8°C	2°C~8°C	-15°C~20°C
Ambient Temperature	38°C~43°C	38°C~43°C	38°C~43°C	38°C~43°C	38°C~43°C	38°C~43°C
Relative Humidity	80%	80%	80%	80%	80%	80%
Shelves	3	3	3	3	3	3
Net Weight	100kg	105kg	100kg	100kg	100kg	105kg
Gross Weight	110kg	115kg	110kg	110kg	110kg	115kg
Packing Dimension	720*880*2010mm	720*880*2010mm	720*880*2010mm	720*880*2010mm	720*880*2010mm	720*880*2010mm
Package	Plywood package	Plywood package	Plywood package	Plywood package	Plywood package	Plywood package

Foaming Thickness: 70mm

Material: Stainless Steel 304

Foaming Thickness: 70mm

*Glass Door Series With LED Light

Material: Stainless Steel 304

Chiller and freezer



FAR6276CS200 FAR12176FS200



FAR12176CS400 FAR12176FS400



FAR12176CG200 FAR12176FG200

FAR12176CS200	FAR12176FS200	FAR12176CS400	FAR12176FS400	FAR12176CG200	FAR12176FG200
2 Doors Fancooling Upright Chiller	2 Doors Fancooling Upright Freezer	4 Doors Fancooling Upright Chiller	4 Doors Fancooling Upright Freezer	2 Glass Doors Fancooling Upright Chiller	2 Glass Doors Fancooling Upright Freezer

Dimension	1210*760*1980mm	1210*760*1980mm	1210*760*1980mm	1210*760*1980mm	1210*760*1980mm
Capacity	935L	935L	935L	935L	935L
Power	580W	940W	580W	940W	580W
Voltage	220-240V-50Hz	220-240V-50Hz	220-240V-50Hz	220-240V-50Hz	220-240V-50Hz
Compressor	Embraco	Embraco	Embraco	Embraco	Embraco
Thermostat	Carel	Carel	Carel	Carel	Carel
Cooling Type	Ventilated	Ventilated	Ventilated	Ventilated	Ventilated
Refrigerant	R404A/387g	R404A/607g	R404A/387g	R404A/387g	R404A/607g
Temperature Range	2°C~8°C	-15°C~-20°C	2°C~8°C	-15°C~-20°C	2°C~8°C
Ambient Temperature	38°C~43°C	38°C~43°C	38°C~43°C	38°C~43°C	38°C~43°C
Relative Humidity	80%	90%	80%	80%	90%
Shelves	6	6	6	6	6
Net Weight	140kg	142kg	140kg	142kg	142kg
Gross Weight	150kg	152kg	150kg	152kg	152kg
Packing Dimension	1300*840*2010mm	1300*830*2010mm	1300*840*2010mm	1300*830*2010mm	1300*830*2010mm
Package	Plywood package	Plywood package	Plywood package	Plywood package	Plywood package

Foaming Thickness: 70mm Material: Stainless Steel 304

Foaming Thickness: 70mm *Glass Door Series With LED Light

Material: Stainless Steel 304

Undercounter Chiller and Freezer

NEW Line Furnotel Evolution Refrigeration

- Stainless steel Exterior / Interior
- Insulation with ecological polyurethane 60 mm
- Rounded inside corners
- Self-closing door under 90°
- Height adjustable stainless steel feet
- Plastic-coated shelves, support up to 30kg



Compressor

Perfect system configuration with international branded compressor.



Punched Air Vents

Punched air vents to strengthen the ventilation cooling.



Quality Material

Stainless steel Exterior / Interior



Adjustable Feet/Castors optional

Stainless steel feet or castors (adjustable feet to change the height of feet over uneven ground, quality castors for easy moving.)



Self-closing Doors

Self-closing doors with magnetic gaskets.



Non-welding Design

The non-welding design to prevent the rust of stainless steel.



Sturdy Construction

Sturdy stainless steel construction, all spare parts with RoHS certification.



2/3/4 doors, or with drawers

The glass door and the foaming doors for freezer or chiller are completely replaceable to increase the versatility of body and spare parts.

Technical Innovation

Undercounter Chillers and Freezers

Furnatel®



The whole machine, can be customized according to the client's requirement. Doors number, or variety combinations by doors and drawers can be changed based on the storing food.



- A. Self-closing doors with magnetic gaskets, remain motionless when it open in angles greater than 90 degrees.
- B. Plastic-coated shelves, support up to 30kg.
- C. The replaceable door heating line, easily solve the after-sales problem.
- D. Completely automatic defrosting and condense water evaporation.
- E. Using digital thermostat, accurate and exact temperature control.

Special foaming on glass door, with no welding and combining stainless steel door frame. Completely replaceable to increase the versatility of body and spare parts. Self-closing against door's failure to close entirely.



Features

- All-out drawers, facilitate to pull-out of drawers, easy for storing food
- COMPEX guide way from Italy, all spare parts with RoHS certification
- Perfect interior design, insure circulation of cold air, keep freshness
- Ventilated cooling type, EBM fan imported from Germany to provide long service life
- Imported compressor(Embraco or Secop)
- Fully removable refrigeration unit-cassette



Perfectly uniform temperature
High efficiency air flow distribution.



Undercounter Chiller and Freezer



FEU13570CS200
FEU13570FS200



FEU18070CS300
FEU18070FS300



FEU22570CS400
FEU22570FS400

	FEU13570CS200 2 Doors Fancooling Undercounter Chiller	FEU13570FS200 2 Doors Fancooling Undercounter Freezer	FEU18070CS300 3 Doors Fancooling Undercounter Chiller	FEU18070FS300 3 Doors Fancooling Undercounter Freezer	FEU22570CS400 4 Doors Fancooling Undercounter Chiller	FEU22570FS400 4 Doors Fancooling Undercounter Freezer
Dimension	1360*700*850mm	1360*700*850mm	1795*700*850mm	1795*700*850mm	2230*700*850mm	2230*700*850mm
Capacity	314L	314L	465L	465L	540L	540L
Power	350W	750W	350W	750W	400W	1000W
Voltage	220-240V-50Hz	220-240V-50Hz	220-240V-50Hz	220-240V-50Hz	220-240V-50/60Hz	220-240V-50/60Hz
Compressor	Zel	Secop	Zel	Secop	Embraco/Secop	Embraco/Secop
Refrigerant	R134a	R404A	R134a	R404A	R134a	R404A
Temperature Range	2°C-8°C	-15°C-20°C	2°C-8°C	-15°C-20°C	0°C-+8°C	-18°C-22°C
Cooling Type	Ventilated	Ventilated	Ventilated	Ventilated	Ventilated	Ventilated
Shelves	2	2	3	3	4	4
Net Weight	96kg	111kg	134kg	136kg	125kg	135kg
Gross Weight	103kg	116kg	140kg	142kg	140kg	150kg



FEU13570CS201
FEU13570FS201



FEU18070CS301
FEU18070FS301



FEU22570CS401
FEU22570FS401

	FEU13570CS201 2 Doors Fancooling Undercounter Chiller with Backsplash	FEU13570FS201 2 Doors Undercounter Fancooling Freezer with Backsplash	FEU18070CS301 3 Doors Fancooling Undercounter Chiller with Backsplash	FEU18070FS301 3 Doors Fancooling Undercounter Freezer with Backsplash	FEU22570CS401 4 Doors Fancooling Undercounter Chiller with Backsplash	FEU22570FS401 4 Doors Fancooling Undercounter Freezer with Backsplash
Dimension	1360*700*950mm	1360*700*950mm	1795*700*950mm	1795*700*950mm	2230*700*950mm	2230*700*950mm
Capacity	260L	260L	400L	400L	540L	540L
Power	400W	400W	400W	400W	400W	1000W
Voltage	220-240V-50Hz	220-240V-50/60Hz	220-240V-50/60Hz	220-240V-50/60Hz	220-240V-50/60Hz	220-240V-50/60Hz
Compressor	Zel	Embraco/Secop	Embraco/Secop	Embraco/Secop	Embraco/Secop	Embraco/Secop
Refrigerant	R134a	R404A	R134a	R134a	R134a	R404A
Temperature Range	2°C-8°C	-18°C-22°C	0°C-+8°C	0°C-+8°C	0°C-+8°C	-18°C-22°C
Cooling Type	Ventilated	Ventilated	Ventilated	Ventilated	Ventilated	Ventilated
Shelves	2	2	3	3	4	4
Net Weight	96kg	102kg	109kg	109kg	129kg	137kg
Gross Weight	103kg	108kg	121kg	121kg	145kg	152kg



Undercounter Chiller and Freezer



FEU13570CG200

2 Glass Doors Fancooling Undercounter Chiller

Dimension	1360*700*850mm
Capacity	260L
Power	400W
Voltage	220-240V~50/60Hz
Compressor	Embraco/Secop
Refrigerant	R134a
Temperature Range	+3°C ~+10°C
Cooling Type	Ventilated
Shelves	2
Net Weight	96KG
Gross Weight	101KG

Digital Thermostat *Feet/Castor: Optional Thickness: 60mm *Drawer is optional

FEU18070CG300

3 Glass Doors Fancooling Undercounter Chiller

Dimension	1795*700*850mm
Capacity	400L
Power	400W
Voltage	220-240V~50/60Hz
Compressor	Embraco/Secop
Refrigerant	R134a
Temperature Range	+3°C ~+10°C
Cooling Type	Ventilated
Shelves	3
Net Weight	112KG
Gross Weight	122KG

Digital Thermostat *Feet/Castor: Optional Thickness: 60mm *Drawer is optional

FEU22570CG400

4 Glass Doors Fancooling Undercounter Chiller

Dimension	2230*700*850mm
Capacity	540L
Power	400W
Voltage	220-240V~50/60Hz
Compressor	Embraco/Secop
Refrigerant	R134a
Temperature Range	+3°C ~+10°C
Cooling Type	Ventilated
Shelves	4
Net Weight	132KG
Gross Weight	147KG

Digital Thermostat *Feet/Castor: Optional Thickness: 60mm *Drawer is optional



Undercounter Chiller and Freezer



FED13570CS120



FED13570CS130



FED13570CS040

FED13570CS120

1 Doors 2 Drawers Fancooling Undercounter Chiller

FED13570CS130

1 Doors 3 Drawers Fancooling Undercounter Chiller


FED13570CS040

4 Drawers Fancooling Undercounter Chiller


Dimension	1360*700*850mm	1360*700*850mm	1360*700*850mm
Capacity	260L	260L	260L
Power	400W	400W	400W
Voltage	220-240V-50/60Hz	220-240V-50/60Hz	220-240V-50/60Hz
Compressor	Embraco/Secop	Embraco/Secop	Embraco/Secop
Refrigerant	R134a	R134a	R134a
Temperature Range	2°C-8°C	2°C-8°C	2°C-8°C
Cooling Type	Ventilated	Ventilated	Ventilated
Net Weight	105kg	106kg	105kg
Gross Weight	112kg	115kg	112kg

Digital Thermostat *Feet/Castor: Optional Thickness: 60mm *Drawer is optional


FED13570CS060



FED18070CS060



FED18070CS070

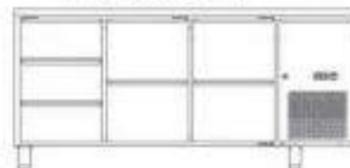

FED13570CS060

6 Drawers Fancooling Undercounter Chiller

FED18070CS060

6x1/2 Drawers Fancooling Undercounter Chiller

FED18070CS070

3x1/3 +4x1/2 Drawers Fancooling Undercounter Chiller

Dimension	1360*700*850mm	1795*700*850mm	1795*700*850mm
Capacity	260L	400L	400L
Power	400W	400W	400W
Voltage	220-240V-50/60Hz	220-240V-50/60Hz	220-240V-50/60Hz
Compressor	Embraco/Secop	Embraco/Secop	Embraco/Secop
Refrigerant	R134a	R134a	R134a
Temperature Range	0°C-+8°C	2°C-8°C	2°C-8°C
Cooling Type	Ventilated	Ventilated	Ventilated
Net Weight	122kg	122kg	130kg
Gross Weight	128kg	130kg	140kg

Digital Thermostat *Feet/Castor: Optional Thickness: 60mm *Drawer is optional



FED18070CS150



FED18070CS090

FED18070CS150

3x1/3 +2x1/2 Drawers Fancooling Undercounter Chiller

FED18070CS090

9x1/3 Drawers Fancooling Undercounter Chiller

Dimension	1795*700*850mm	1795*700*850mm
Capacity	400L	400L
Power	400W	400W
Voltage	220-240V-50/60Hz	220-240V-50/60Hz
Compressor	Embraco/Secop	Embraco/Secop
Refrigerant	R134a	R134a
Temperature Range	2°C-8°C	2°C-8°C
Cooling Type	Ventilated	Ventilated
Net Weight	136kg	141kg
Gross Weight	146kg	151kg

Digital Thermostat *Feet/Castor: Optional Thickness: 60mm *Drawer is optional



FED22570CS320



FED22570CS240

FED22570CS320

3 Doors 2 Drawers Fancooling Undercounter Chiller

FED22570CS240

2 Doors 4 Drawers Fancooling Undercounter Chiller

FED22570CS250

2 Doors 5 Drawers Fancooling Undercounter Chiller

FED22570CS170

1 Doors 7 Drawers Fancooling Undercounter Chiller

Dimension	2230*700*850mm	2230*700*850mm	2230*700*850mm	2230*700*850mm
Capacity	540L	540L	540L	540L
Power	400W	400W	400W	400W
Voltage	220-240V-50/60Hz	220-240V-50/60Hz	220-240V-50/60Hz	220-240V-50/60Hz
Compressor	Embraco/Secop	Embraco/Secop	Embraco/Secop	Embraco/Secop
Refrigerant	R134a	R134a	R134a	R134a
Temperature Range	2°C-8°C	2°C-8°C	2°C-8°C	2°C-8°C
Cooling Type	Ventilated	Ventilated	Ventilated	Ventilated
Net Weight	135kg	153kg	158kg	169kg
Gross Weight	150kg	168kg	173kg	184kg

Digital Thermostat *Feet/Castor: Optional Thickness: 60mm *Drawer is optional

Undercounter Chiller and Freezer

0~8°C -16~-20°C



FAU12076CS200

2 Doors Fancooling Undercounter Chiller

FAU15076CS200

2 Doors Fancooling Undercounter Chiller

FAU18076CS300

3 Doors Fancooling Undercounter Chiller

Dimension	1200*760*850mm	1500*760*850mm	1800*760*850mm
Capacity	260L	370L	480L
Power	340W	400W	425W
Voltage	220-240V~50Hz	220-240V~50Hz	220-240V~50Hz
Compressor Brand	Embraco	Embraco	Embraco
Thermostat	Carel	Carel	Carel
Cooling Type	Ventilated	Ventilated	Ventilated
Refrigerant	R134A/210g	R134A/250g	R134A/270g
Temperature Range	2°C~8°C	2°C~8°C	2°C~8°C
Ambient Temperature	40°C~43°C	40°C~43°C	40°C~43°C
Shelves	2	2	2
Net Weight	77kg	87kg	97kg
Gross Weight	87kg	97kg	107kg

Relative Humidity:80% Material:Stainless Steel 304 Foaming Thickness:60mm

FAU12076FS200

2 Doors Fancooling Undercounter Freezer

FAU15076FS200

2 Doors Fancooling Undercounter Freezer

FAU18076FS300

3 Doors Fancooling Undercounter Freezer

Dimension	1200*760*850mm	1500*760*850mm	1800*760*850mm
Capacity	260L	370L	480L
Power	380W	425W	475W
Voltage	220-240V~50Hz	220-240V~50Hz	220-240V~50Hz
Compressor Brand	Embraco/Secop	Embraco	Embraco
Thermostat	Carel	Carel	Carel
Cooling Type	Ventilated	Ventilated	Ventilated
Refrigerant	R404A/237g	R404A/270g	R404A/320g
Temperature Range	-15°C~-20°C	-15°C~-20°C	-15°C~-20°C
Ambient Temperature	40°C~43°C	40°C~43°C	40°C~43°C
Shelves	2	2	2
Net Weight	77kg	87kg	100kg
Gross Weight	87kg	97kg	110kg

Relative Humidity:80% Material:Stainless Steel 304 Foaming Thickness:60mm



FAU12076CG200

2 Glass Doors Fancooling Undercounter Chiller

FAU15076CG200

2 Glass Doors Fancooling Undercounter Chiller

FAU18076CG300

3 Glass Doors Fancooling Undercounter Chiller

Dimension	1200*760*850mm	1500*760*850mm	1800*760*850mm
Capacity	260L	370L	480L
Power	340W	400W	425W
Voltage	220-240V~50Hz	220-240V~50Hz	220-240V~50Hz
Compressor Brand	Embraco	Embraco	Embraco
Thermostat	Carel	Carel	Carel
Cooling Type	Ventilated	Ventilated	Ventilated
Refrigerant	R134A/237g	R134A/257g	R134A/298g
Temperature Range	2°C~8°C	2°C~8°C	2°C~8°C
Ambient Temperature	40°C~43°C	40°C~43°C	40°C~43°C
Shelves	2	2	2
Net Weight	87kg	87kg	100kg
Gross Weight	97kg	97kg	110kg

Relative Humidity:80% Material:Stainless Steel 304 Foaming Thickness:60mm



FAU12076FG200

2 Glass Doors Fancooling Undercounter Freezer

FAU15076FG200

2 Glass Doors Fancooling Undercounter Freezer

FAU18076FG300

3 Glass Doors Fancooling Undercounter Freezer

Dimension	1200*760*850mm	1500*760*850mm	1800*760*850mm
Capacity	260L	370L	480L
Power	380W	425W	475W
Voltage	220-240V~50Hz	220-240V~50Hz	220-240V~50Hz
Compressor Brand	Embraco/Secop	Embraco	Embraco
Thermostat	Carel	Carel	Carel
Cooling Type	Ventilated	Ventilated	Ventilated
Refrigerant	R404A/220g	R404A/298g	R404A/298g
Temperature Range	-15°C~-20°C	-15°C~-20°C	-15°C~-20°C
Ambient Temperature	40°C~43°C	40°C~43°C	40°C~43°C
Shelves	2	2	2
Net Weight	77kg	87kg	100kg
Gross Weight	87kg	97kg	110kg

Relative Humidity:80% Material:Stainless Steel 304 Foaming Thickness:60mm

Refrigeration Prep Station


- Integral stretched stainless steel body
- Insulation with ecological polyurethane 60mm
- Rounded inside corners
- Self-closing doors under 90°
- Height adjustable stainless steel feet
- Plastic-coated shelves, support up to 30kg
- Dixell Thermostat from Italy
- **Cover:** Flat Stainless Steel Cover Series/
Glass Cover Series



Pan coolers



- Inside/outside body stainless steel
- Ecology friendly HCFC free polyurethane insulation
- Dixell Thermostat from Italy
- Cover: Flat Glass Cover Series/Stainless Steel Cover Series
- Ventilated cooling type, EBM fan imported from Germany to provide long service life
- Using digital thermostat, accurate and exact temperature control
- Stainless steel drawer for a whole Gastronorm Containers
- COMPEX guide way from Italy, all spare parts with RoHS certification
- Completely automatic defrosting and condense water evaporation
- Fully removable refrigeration unit-cassette

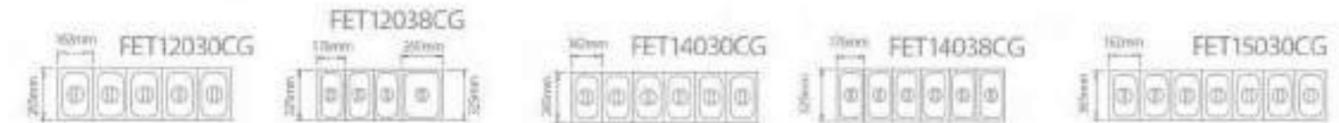


	FET12030CG	FET12038CG	FET14030CG	FET14038CG	FET15030CG
	1.2m Static Cooling Countertop Display Showcase	1.2m Static Cooling Countertop Display Showcase	1.4m Static Cooling Countertop Display Showcase	1.4m Static Cooling Countertop Display Showcase	1.5m Static Cooling Countertop Display Showcase
Dimension	1200*335*430mm	1200*395*430mm	1200*395*430mm	1400*335*430mm	1500*335*430mm
Power	200W	200W	200W	200W	200W
Voltage	220-240V/50Hz	220-240V/50Hz	220-240V/50Hz	220-240V/50Hz	220-240V/50Hz
GN Pan	1/4*5 pcs	1/3*3+1/2*1 pcs	1/3*3+1/2*1 pcs	1/4*6 pcs	1/4*7 pcs
Weight	35kg	38kg	38kg	38kg	40kg
Material	Stainless Steel 304				
Refrigerant: R134a Temperature Range: 0°C ~ +8°C Compressor: Embraco Thermostat: Dixell *GN pans are not included					



	FET15038CG	FET16030CG	FET16038CG	FET18030CG	FET18038CG
	1.5m Static Cooling Countertop Display Showcase	1.6m Static Cooling Countertop Display Showcase	1.6m Static Cooling Countertop Display Showcase	1.8m Static Cooling Countertop Display Showcase	1.8m Static Cooling Countertop Display Showcase
Dimension	1500*395*430mm	1600*335*430mm	1600*395*430mm	1800*335*430mm	1800*395*430mm
Power	200W	200W	200W	200W	200W
Voltage	220-240V/50Hz	220-240V/50Hz	220-240V/50Hz	220-240V/50Hz	220-240V/50Hz
GN Pan	1/3*5+1/2*1 pcs	1/4*7 pcs	1/3*7 pcs	1/4*9 pcs	1/3*8 pcs
Weight	42kg	41kg	45kg	44kg	47kg
Material	Stainless Steel 304				
Refrigerant: R134a Temperature Range: 0°C ~ +8°C Compressor: Embraco Thermostat: Dixell *GN pans are not included					



	FET12030CS	FET12038CS	FET14030CS	FET14038CS	FET15030CS
	1.2m Static Cooling Countertop Display Showcase	1.2m Static Cooling Countertop Display Showcase	1.4m Static Cooling Countertop Display Showcase	1.4m Static Cooling Countertop Display Showcase	1.5m Static Cooling Countertop Display Showcase
Dimension	1200*335*430mm	1200*395*430mm	1400*335*430mm	1400*395*430mm	1500*335*430mm
Power	200W	200W	200W	200W	200W
Voltage	220-240V/50Hz	220-240V/50Hz	220-240V/50Hz	220-240V/50Hz	220-240V/50Hz
GN Pan	1/4*5 pcs	1/3*3+1/2*1 pcs	1/4*6 pcs	1/3*6 pcs	1/4*7 pcs
Weight	35kg	38kg	38kg	40kg	40kg
Material	Stainless Steel 304				
Refrigerant: R134a Temperature Range: 0°C ~ +8°C Compressor: Embraco Thermostat: Dixell *GN pans are not included					



	FET15038CS	FET16030CS	FET16038CS	FET18030CS	FET18038CS
	1.5m Static Cooling Countertop Display Showcase	1.6m Static Cooling Countertop Display Showcase	1.6m Static Cooling Countertop Display Showcase	1.8m Static Cooling Countertop Display Showcase	1.8m Static Cooling Countertop Display Showcase
Dimension	1500*395*430mm	1600*335*430mm	1600*395*288mm	1800*335*430mm	1800*395*430mm
Power	200W	200W	200W	200W	200W
Voltage	220-240V/50Hz	220-240V/50Hz	220-240V/50Hz	220-240V/50Hz	220-240V/50Hz
GN Pan	1/3*5+1/2*1 pcs	1/4*7 pcs	1/3*7 pcs	1/4*9 pcs	1/3*8 pcs
Weight	42kg	41kg	45kg	44kg	47kg
Material	Stainless Steel 304				
Refrigerant: R134a Temperature Range: 0°C ~ +8°C Compressor: Embraco Thermostat: Dixell *GN pans are not included					



Refrigeration

Prep Station



FES18070CS300T



FEP13570CS200
FEP15080CS200



	FEP13570CS200	FEP15080CS200	FEP18070CS300
	2 Doors Fancooling Pizza Pre Station	2 Doors Fancooling Pizza Pre Station	3 Doors Fancooling Pizza Pre Station
Dimension	1360*700*1030mm	1510*800*990mm	1795*700*1030mm
Voltage	220-240V-50/60Hz	220-240V-50Hz	220-240V-50Hz
Power	400W	400W	400W
Capacity	260L	360L	540L
Temperature Range	0°C-8°C	2°C-8°C	0°C-8°C
Compressor	R134a	R134a	R134a
Refrigerant	Embraco/Secop	Embraco/Secop	Embraco/Secop
Cooling System	Fancooling	Ventilated	Fancooling
Thermostat	Dixell	Dixell	Dixell
Shelf Number	2	2	2
Net Weight	135kg	183KG	170KG
Gross Weight	145kg	228KG	180KG
Material:Stainless Steel 304 *Feet/Castor:Optional Foaming Thickness:60mm			

	FES13570CS200T	FES15080CS200T	FES18070CS300T
	2 Doors Fancooling Salad Bar Pre Station	2 Doors Fancooling Salad Bar Pre Station	3 Doors Fancooling Salad Bar Pre Station
Dimension	1360*700*1050mm	1510*800*1050mm	1795*700*1050mm
Voltage	220-240V-50/60Hz	220-240V-50Hz	220-240V-50Hz
Power	400W	400W	400W
Capacity	330L	440L	490L
Temperature Range	2°C-8°C	2°C-8°C	2°C-8°C
Refrigerant	R134a	R134a	R134a
Compressor	Embraco/Secop	Embraco/Secop	Embraco/Secop
Cooling System	Fancooling	Ventilated	Ventilated
Thermostat	Dixell	Dixell	Dixell
Shelf Number	2	2	3
Net Weight	106kg	112kg	120kg
Gross Weight	139kg	126kg	165kg
Material:Stainless Steel 304 *Feet/Castor:Optional Foaming Thickness:60mm			

	FEP20280CS260
	2 Doors 6 Drawers Fancooling Pizza Pre Station
Dimension	2025*800*1030mm
Voltage	220-240V-50Hz
Power	400W
Capacity	460L
Temperature Range	2°C-8°C
Compressor	R134a
Refrigerant	Embraco/Secop
Cooling System	Fancooling
Thermostat	Dixell
Shelf Number	2
Net Weight	300KG
Gross Weight	320KG
Material:Stainless Steel 304 *Feet/Castor:Optional Foaming Thickness:60mm	



FEP20280CS260

Bar Refrigerator

Available as a one, two or three door model, the Furnotel Bar Refrigerator maintains interior temperature between +1~+8°C or +2~+10°C to ensure drinks are always cool when served.



2~+10°C



FBB6050CG100H



FBB9050CG200H
FBB9050CG200S



FBB13550CG300H
FBB13550CG300S

FBB6050CG100H

1 Hinged door Fancooling Bar Refrigerator

Dimension	600*500*840mm
Voltage	220V/50Hz
Power	150W
Temperature Range	4°C~10°C
Capacity	130L
Ambient Temperature	25°C
Refrigerant	R600a/55g
Cooling system	Fancooling
Compressor	wanbao
Thermostat	Carel
Doors type	Hinged door
Net Weight	44KG

FBB9050CG200H

2 Hinged door Fancooling Bar Refrigerator

Dimension	900*500*840mm
Voltage	220V/50Hz
Power	210W
Temperature Range	4°C~10°C
Capacity	193L
Ambient Temperature	25°C
Refrigerant	R600a/65g
Cooling system	Fancooling
Compressor	wanbao
Thermostat	Carel
Doors type	Hinged door
Net Weight	60KG

FBB9050CG200S

2 Sliding Door Fancooling Bar Refrigerator

Dimension	900*500*840mm
Voltage	220V/50Hz
Power	210W
Temperature Range	4°C~10°C
Capacity	193L
Ambient Temperature	25°C
Refrigerant	R600a/65g
Cooling system	Fancooling
Compressor	wanbao
Thermostat	Carel
Doors type	Sliding Door
Net Weight	60KG

FBB13550CG300H

3 Hinged door Fancooling Bar Refrigerator

Dimension	1350*500*840mm
Voltage	220V/50Hz
Power	270W
Temperature Range	4°C~10°C
Capacity	300L
Ambient Temperature	25°C
Refrigerant	R600a/75g
Cooling system	Fancooling
Compressor	wanbao
Thermostat	Carel
Doors type	Hinged door
Net Weight	98KG

FBB13550CG300S

3 Sliding Door Fancooling Bar Refrigerator

Dimension	1350*500*840mm
Voltage	220V/50Hz
Power	270W
Temperature Range	4°C~10°C
Capacity	300L
Ambient Temperature	25°C
Refrigerant	R600a/75g
Cooling system	Fancooling
Compressor	wanbao
Thermostat	Carel
Doors type	Sliding Door
Net Weight	98KG



Ice Maker



FEIM36CF

36kg Cube Ice Maker

Dimension	500*450*800mm
Power	300W
Productivity	36kg/24h
Storage Capacity	15kg
Voltage	220V/50Hz
Net Weight	30kg
Material	Stainless Steel 304
Refrigerant	R404a
Cooling Type	Aircooling



FEIM55CF

55kg Cube Ice Maker

Dimension	500*520*850mm
Power	360W
Productivity	55kg/24h
Storage Capacity	18kg
Voltage	220V/50Hz
Net Weight	45kg
Material	Stainless Steel 304
Refrigerant	R404a
Cooling Type	Aircooling



FEIM73CF

73kg Cube Ice Maker

Dimension	660*685*920mm
Power	460W
Productivity	73kg/24h
Storage Capacity	36kg
Voltage	220V/50Hz
Net Weight	55kg
Material	Stainless Steel 304
Refrigerant	R404a
Cooling Type	Aircooling



FEIM95CF

95kg Cube Ice Maker

Dimension	660*685*920mm
Power	580W
Productivity	95kg/24h
Storage Capacity	36kg
Voltage	220V/50Hz
Net Weight	57kg
Material	Stainless Steel 304
Refrigerant	R404a
Cooling Type	Aircooling

FEIM127CF

127kg Cube Ice Maker

Dimension	660*685*920mm
Power	580W
Productivity	127kg/24h
Storage Capacity	36kg
Voltage	220V/50Hz
Net Weight	60kg
Material	Stainless Steel 304
Refrigerant	R404a
Cooling Type	Aircooling



FEIM159SF

159kg Separate Type Cube Ice Maker

Dimension	560*830*1718mm
Power	1000W
Productivity	159kg/24h
Storage Capacity	105kg
Voltage	220V/50Hz
Net Weight	85g
Material	Stainless Steel 304
Refrigerant	R404a
Cooling Type	Air/Water cooling

FEIM191SF

191kg Separate Type Cube Ice Maker

Dimension	560*830*1718mm
Power	1100W
Productivity	191kg/24h
Storage Capacity	106kg
Voltage	220V/50Hz
Net Weight	87g
Material	Stainless Steel 304
Refrigerant	R404a
Cooling Type	Air/Water cooling

FEIM227SF

227kg Separate Type Cube Ice Maker

Dimension	760*830*1718mm
Power	1240W
Productivity	227kg/24h
Storage Capacity	125kg
Voltage	220V/50Hz
Net Weight	111g
Material	Stainless Steel 304
Refrigerant	R404a
Cooling Type	Air/Water cooling



FEIM318SF

318kg Separate Type Cube Ice Maker

Dimension	760*830*1718mm
Power	1420W
Productivity	318kg/24h
Storage Capacity	125kg
Voltage	220V/50Hz
Net Weight	111g
Material	Stainless Steel 304
Refrigerant	R404a
Cooling Type	Air/Water cooling

FEIM455SF

455kg Separate Type Cube Ice Maker

Dimension	760*830*1853mm
Power	2380W
Productivity	455kg/24h
Storage Capacity	125kg
Voltage	220V/50Hz
Net Weight	130g
Material	Stainless Steel 304
Refrigerant	R404a
Cooling Type	Air/Water cooling



FEIM682SF

682kg Separate Type Cube Ice Maker

Dimension	1227*973*1928mm
Power	2850W
Productivity	628kg/24h
Storage Capacity	315kg
Voltage	220V/50Hz
Net Weight	170kg
Material	Stainless Steel 304
Refrigerant	R404a
Cooling Type	Air/Water cooling



FEIM909SF

909kg Separate Type Cube Ice Maker

Dimension	1227*973*1928mm
Power	3800W
Productivity	909kg/24h
Storage Capacity	315kg
Voltage	220V/50Hz
Net Weight	220kg
Material	Stainless Steel 304
Refrigerant	R404a
Cooling Type	Air/Water cooling



	FGIM80CF	FGIM130CF	FGIM180CF
	85kg Granular Cube Ice Maker	130kg Granular Cube Ice Maker	180kg Granular Cube Ice Maker
Dimension	540*745*834mm	540*745*834mm	685*795*1044mm
Power	550W	650W	750W
Productivity	85kg/24h	130kg/24h	180kg/24h
Storage Capacity	30kg	30kg	55kg
Voltage	220V/50Hz	220V/50Hz	220V/50Hz
Net Weight	61kg	63kg	70
Gross Weight	74kg	76kg	83
Material	Stainless Steel 304,0.8mm	Stainless Steel 304,0.8mm	Stainless Steel 304,0.8mm
Compressor	SECOP	SECOP	SECOP
Fan	WEIGUANG	WEIGUANG	WEIGUANG
Refrigerant	R404a	R404a	R404a
Cooling Type	Aircooling	Aircooling	Aircooling



	FMIM80CF	FMIM120CF
	80kg Mine Cube Ice Maker	120kg Mine Cube Ice Maker
Dimension	685*795*1044mm	685*795*1044mm
Power	550W	700W
Productivity	80kg/24h	120kg/24h
Storage Capacity	55kg	55kg
Voltage	220V/50Hz	220V/50Hz
Net Weight	79kg	75kg
Gross Weight	94kg	94kg
Material	Stainless Steel 304,0.8mm	Stainless Steel 304,0.8mm
Compressor	SECOP	SECOP
Fan	WEIGUANG	WEIGUANG
Refrigerant	R404a	R404a
Cooling Type	Aircooling	Aircooling



	FGIM650SF	FGIM1000SF
	650kg Granular Separate Type Cube Ice Maker	1000kg Granular Separate Type Cube Ice Maker
Dimension	1230*945*2115mm	1230*945*2115mm
Power	4200W	4600W
Productivity	650kg/24h	1000kg/24h
Storage Capacity	600kg	600kg
Voltage	380V/50Hz	380V/50Hz
Net Weight	228kg	248kg
Gross Weight	263kg	283kg
Material	Stainless Steel 304,0.8mm	Stainless Steel 304,0.8mm
Compressor	Tecumseh	Tecumseh
Fan	WEIGUANG	WEIGUANG
Refrigerant	R404a	R404a
Cooling Type	Aircooling	Aircooling



	FMIM650SF	FMIM1000SF
	650kg Mine Separate Type Cube Ice Maker	1000kg Mine Separate Type Cube Ice Maker
Dimension	1230*945*2115mm	1230*945*2115mm
Power	4200W	4600W
Productivity	650kg/24h	1000kg/24h
Storage Capacity	600kg	600kg
Voltage	380V/50Hz	380V/50Hz
Net Weight	228kg	248kg
Gross Weight	263kg	283kg
Material	Stainless Steel 304,0.8mm	Stainless Steel 304,0.8mm
Compressor	Tecumseh	Tecumseh
Fan	WEIGUANG	WEIGUANG
Refrigerant	R404a	R404a
Cooling Type	Aircooling	Aircooling



	FCIM180SF	FCIM280SF
	180kg Crescent Separate Type Cube Ice Maker	280kg Crescent Separate Type Cube Ice Maker
Dimension	565*673*1885mm	757*873*1885mm
Power	1500W	1850W
Productivity	180kg/24h	280kg/24h
Storage Capacity	140kg	200kg
Voltage	220V/50Hz	220V/50Hz
Net Weight	82kg	84kg
Gross Weight	100kg	102kg
Material	Stainless Steel 304,0.8mm	Stainless Steel 304,0.8mm
Compressor	Embraco	Embraco
Fan	WEIGUANG	WEIGUANG
Refrigerant	R404a	R404a
Cooling Type	Aircooling	Aircooling
Ice Cube Tray	8*12*2	8*14*2
Ice lattice Material	Stainless Steel 304,0.8mmCopper Nickel Alloy	Stainless Steel 304,0.8mmCopper Nickel Alloy





FBIM25CF
FBIM35CF



FFIM200SF
FFIM300SF
FFIM500SF



FFIM1000SF

FBIM25CF

25kg Bullet Cube Ice Maker

FBIM35CF

35kg Bullet Cube Ice Maker

Dimension	375*575*762mm	375*575*762mm
Power	300W	320W
Productivity	25kg/24h	35kg/24h
Storage Capacity	15kg	15kg
Voltage	220V/50Hz	220V/50Hz
Net Weight	35kg	35kg
Gross Weight	39kg	39kg
Material	Stainless Steel 304,0.8mm	Stainless Steel 304,0.8mm
Compressor	SECOP	SECOP
Refrigerant	R404A	R404A
Cooling Type	Aircooling	Aircooling

FFIM200SF

200kg Flake Separate Type
Cube Ice Maker

FFIM300SF

300kg Flake Separate Type
Cube Ice Maker

FFIM500SF

500kg Flake Separate Type
Cube Ice Maker

FFIM1000SF

1000kg Flake Separate Type
Cube Ice Maker

Dimension	770*910*1910mm	770*910*1960mm	770*910*1960mm	1320*970*2080mm
Power	1338W	1662W	1766W	4800W
Productivity	200kg/24h	300kg/24h	500kg/24h	1000kg/24h
Storage Capacity	240kg	240kg	240kg	600kg
Voltage	220V/50Hz	220V/50Hz	220V/50Hz	380V/50Hz
Net Weight	112kg	135kg	141kg	230kg
Gross Weight	138kg	150kg	159kg	265kg
Material	Stainless Steel 304,0.8mm	Stainless Steel 304,0.8mm	Stainless Steel 304,0.8mm	Stainless Steel 304,0.8mm
Compressor	Embraco	Embraco	Tecumseh	Tecumseh
Fan	WEIGUANG	WEIGUANG	WEIGUANG	WEIGUANG
Refrigerant	R404a	R404a	R404a	R404a
Cooling Type	Aircooling	Aircooling	Aircooling	Aircooling





FRBC-267
FRBC-388
FRBC-541

FRBC-680
FRBC-942

FRBC-1592

FRBC-267

267L Single door ventilated cooling beverage cooler

	FRBC-267	FRBC-388	FRBC-541
	267L Single door ventilated cooling beverage cooler	388L Single door ventilated cooling beverage cooler	541L Single door ventilated cooling beverage cooler
Dimension	580*550*1800mm	600*700*1980mm	680*810*1980mm
Power	210W	220W	260W
Voltage	220v/50hz	220v/50hz	220v/50hz
Temperature Range	1-10°C	1-10°C	1-10°C
Cooling Type	Ventilated cooling	Ventilated cooling	Ventilated cooling
Refrigerant	R600a	R600a	R290a
Gross Capacity	267L	388L	541L
Net Weight	35KG	58KG	65KG
Gross Weight	61KG	86KG	79KG
Parking Dimension	620*610*1890mm	640*750*2020mm	720*860*2020mm

FRBC-680

680L Double door ventilated cooling beverage cooler

	FRBC-680	FRBC-942
	680L Double door ventilated cooling beverage cooler	942L Double door ventilated cooling beverage cooler with canopy
Dimension	1050*640*2020mm	1215*730*2020mm
Power	330W	400W
Voltage	220v/50hz	220v/50hz
Temperature Range	1-10°C	1-10°C
Cooling Type	Ventilated cooling	Ventilated cooling
Refrigerant	R290	R290a
Gross Capacity	680L	942L
Net Weight	91KG	108KG
Gross Weight	103KG	117KG
Parking Dimension	1090*660*2050mm	1255*750*2050mm

FRBC-1592

1592L Triple door ventilated cooling beverage cooler

	FRBC-1592
	1592L Triple door ventilated cooling beverage cooler
Dimension	1830*730*2020mm
Power	450W
Voltage	220v/50hz
Temperature Range	1-10°C
Cooling Type	Ventilated cooling
Refrigerant	R290a
Gross Capacity	1592L
Net Weight	148KG
Gross Weight	162KG
Parking Dimension	1870*760*2050mm

Deli Case



FRVDC-0907A
FRVDC-1207A
FRVDC-1507A
FRVDC-1807A



FRCDC-0907A
FRCDC-1207A
FRCDC-1507A
FRCDC-1807A



FRVDC-0907A **FRVDC-1507A** **FRVDC-1507A** **FRVDC-1807A**

0.9m 3-layer Vertical Refrigerated Deli Case **1.2m 3-layer Vertical Refrigerated Deli Case** **1.5m 3-layer Vertical Refrigerated Deli Case** **1.8m 3-layer Vertical Refrigerated Deli Case**

Dimension	900*680*1200mm	1200*680*1200mm	1500*680*1200mm	1800*680*1200mm
Voltage	220V/50Hz	220V/50Hz	220V/50Hz	220V/50Hz
Power	421W	495W	615W	780W
Compressor	Secop	Secop	Secop	Secop
Cooling Type	Ventilated cooling	Ventilated cooling	Ventilated cooling	Ventilated cooling
Refrigerant	R134a	R134a	R134a	R134a
Temperature Range	-2~8°C	-2~8°C	-2~8°C	-2~8°C

FRCDC-0907A **FRCDC-1207A** **FRCDC-1507A** **FRCDC-1807A**

0.9m 3-layer Curved Refrigerated Deli Case **1.2m 3-layer Curved Refrigerated Deli Case** **1.5m 3-layer Curved Refrigerated Deli Case** **1.8m 3-layer Curved Refrigerated Deli Case**

Dimension	900*680*1200mm	1200*680*1200mm	1500*680*1200mm	1800*680*1200mm
Voltage	220V/50Hz	220V/50Hz	220V/50Hz	220V/50Hz
Power	421W	495W	615W	780W
Compressor	Secop	Secop	Secop	Secop
Cooling Type	Ventilated cooling	Ventilated cooling	Ventilated cooling	Ventilated cooling
Refrigerant	R134a	R134a	R134a	R134a
Temperature Range	-2~8°C	-2~8°C	-2~8°C	-2~8°C



FRVDC-0907B
FRVDC-1207B
FRVDC-1507B
FRVDC-1807B



FRCDC-0907B
FRCDC-1207B
FRCDC-1507B
FRCDC-1807B



FRVDC-0907B **FRVDC-1207B** **FRVDC-1507B** **FRVDC-1807B**

0.9m 4-layer Vertical Refrigerated Deli Case **1.2m 4-layer Vertical Refrigerated Deli Case** **1.5m 4-layer Vertical Refrigerated Deli Case** **1.8m 4-layer Vertical Refrigerated Deli Case**

Dimension	900*680*1380mm	1200*680*1380mm	1500*680*1380mm	1800*680*1380mm
Voltage	220V/50Hz	220V/50Hz	220V/50Hz	220V/50Hz
Power	470W	613W	689W	822W
Compressor	Secop	Secop	Secop	Secop
Cooling Type	Ventilated cooling	Ventilated cooling	Ventilated cooling	Ventilated cooling
Refrigerant	R134a	R134a	R134a	R134a
Temperature Range	-2~8°C	-2~8°C	-2~8°C	-2~8°C

FRCDC-0907B **FRCDC-1207B** **FRCDC-1507B** **FRCDC-1807B**

0.9m 4-layer Curved Refrigerated Deli Case **1.2m 4-layer Curved Refrigerated Deli Case** **1.5m 4-layer Curved Refrigerated Deli Case** **1.8m 4-layer Curved Refrigerated Deli Case**

Dimension	900*680*1380mm	1200*680*1380mm	1500*680*1380mm	1800*680*1380mm
Voltage	220V/50Hz	220V/50Hz	220V/50Hz	220V/50Hz
Power	780W	613W	689W	822W
Compressor	Secop	Secop	Secop	Secop
Cooling Type	Ventilated cooling	Ventilated cooling	Ventilated cooling	Ventilated cooling
Refrigerant	R134a	R134a	R134a	R134a
Temperature Range	-2~8°C	-2~8°C	-2~8°C	-2~8°C

Gelato Showcase



FRCGS-1009
FRCGS-1108



FRVGS-1009
FRVGS-1108



FRCGS-0607



FRCGS-0607

Counter top three pans gelato showcase

Dimensions	670*750*375
Voltage	220V/50Hz
Power	200W
1/3 PANS	3
Temp	-16~-18°C

FRCGS-1009

Ten pans Curved Glass Gelato Showcase

FRCGS-1108

Twelve pans Curved Glass Gelato Showcase

FRVGS-1009

Ten pans Straight Glass Gelato Showcase

FRVGS-1108

Twelve pans Straight Glass Gelato Showcase

	FRCGS-1009	FRCGS-1108	FRVGS-1009	FRVGS-1108
Dimensions	1056*885*1300	1256*885*1300	1056*885*1300	1256*885*1300
Voltage	220V/50Hz	220V/50Hz	220V/50Hz	220V/50Hz
Power	1050W	1200W	1050W	1200W
1/3 PANS	7	9	7	9
1/4 PANS	10	12	10	12
Round Drum	6	8	6	8
Temp	-16~-18°C	-16~-18°C	-16~-18°C	-16~-18°C



Ice Cream Cart



FRICC-2412A



FRICC-2412B

FRICC-2412A

Twelve pans Curved glass
Ice cream Cart

Dimensions	2405*1205*2435
Voltage	220V/50Hz
Power	1200W
1/3 PANS	9
1/4 PANS	12
Round Drum	8
Temp	-16~-20°C

FRICC-2412B

Twelve pans Curved glass
Ice cream Cart

Dimensions	2405*1205*2435
Voltage	220V/50Hz
Power	1200W
1/3 PANS	9
1/4 PANS	12
Round Drum	8
Temp	-16~-20°C



FRICC-1307

FRICC-1307

Three pans Ice cream Cart

Dimensions	1329*724*2226
Voltage	220V/50Hz
Power	200W
1/3 PANS	3
Temp	-16~-18°C



Ice Cream Machine

Chest Freezer/Refrigerator



FRSIC18B

FRSIC18B

Tabletop 18-25L Soft Ice Cream Machine

Dimensions	740*518*780
Voltage	220V/50Hz
Power	1700W
Production capacity	18-25L/H
Tank	2*7L
Cylinder	2*1.BL
Compressor	PANASONIC R22
Net Weight	108kg
Gross Weight	112kg



FRHIC15

FRHIC15

Tabletop 15L Hard Ice Cream Machine

Dimensions	405*600*645mm
Voltage	220V/50Hz
Power	1350W
Production capacity	13L/H
Compressor	PANASONIC R22
Net Weight	54kg
Gross Weight	60kg



FRSIC18A

FRSIC18A

Floor Standing 18-25L Soft Ice Cream Machine

Dimensions	740*518*1310mm
Voltage	220V/50Hz
Power	1700W
Production capacity	18-25L/H
Tank	2*7L
Cylinder	2*1.BL
Compressor	PANASONIC R22
Net Weight	135kg
Gross Weight	140kg



Static Cooling Chest Freezer / Refrigerator



FRCRF-1007

288L Static Cooling Chest Freezer / Refrigerator

FRCRF-1207

368L Static Cooling Chest Freezer / Refrigerator

FRCRF-1507

473L Static Cooling Chest Freezer / Refrigerator

FRCRF-1807

550L Static Cooling Chest Freezer / Refrigerator

	FRCRF-1007	FRCRF-1207	FRCRF-1507	FRCRF-1807
Dimension	1033*765*895mm	1280*765*895mm	1533*765*895mm	1815*765*895mm
Packing Dimension	1080*778*915mm	1325*778*915mm	1580*778*915mm	1860*778*915mm
Capacity	288L	368L	473L	550L
Refrigerant	R600a	R600a	R290	R290
Temperature	-18°C/±10°C	-18°C/±10°C	-18°C/±10°C	-18°C/±10°C
Voltage	220V/50Hz	220V/50Hz	220V/50Hz	220V/50Hz
Input Power	95W	138W	215W	215W
Net Weight	40kg	50kg	59kg	76kg
Gross Weight	44kg	55kg	66kg	93kg

FRCRF-2007

288L Static Cooling Chest Freezer / Refrigerator

FRCRF-2009

368L Static Cooling Chest Freezer / Refrigerator

FRCRF-2309

550L Static Cooling Chest Freezer / Refrigerator

	FRCRF-2007	FRCRF-2009	FRCRF-2309
Dimension	2075*765*895mm	2030*900*915mm	2280*900*915mm
Packing Dimension	2120*778*915mm	2080*925*935mm	2330*925*935mm
Capacity	670L	850L	978L
Refrigerant	R290	R290	R290
Temperature	-18°C/±10°C	-18°C/±10°C	-18°C/±10°C
Voltage	220V/50Hz	220V/50Hz	220V/50Hz
Input Power	285W	295W	380W
Net Weight	80kg	90kg	95kg
Gross Weight	88kg	105kg	115kg



“Designed to meet all the requirements of a modern, fast drink and snack service.”

Basic equipment for cafes, pubs and snack bars



Furnotel Snack Equipment Series

Wide use with high output

Top quality materials guarantee durability over time.



New emotions in your kitchen
It's actually very simple to make delicious snacks.

Maximum capacity, Minimum space

Countertop fryer series

Available with 1 or 2-tank, with or without drain valve, to meet different demands.



Selected
high quality
stainless steel



4L/6L/8L/12L gas/electric fryer, to meet the requirements of different kinds of food.

Fryer

Safe operation

Built-in heat element. Safe operation with the cover and plastic coated heat resistant handles.



Countertop Electric/Gas Fryer

Electric fryer

Bottom stainless steel heating element under the tank. Pilot light to indicate heating. Control by temperature limiter.



Gas fryer

Cast iron burners. Automatic burner ignition by means of an electromagnetic valve, with pilot light and thermocouple.



A range of countertop fryers

- Regulation by temperature limiter
- Protection against overheating
- Reasonable design for oil saving
- Meet the hygiene requirements



Fryer Series



FSFR0504E62



FSFR0304E121



FSFR0604E122



FSFR0304E121

12L Electric
1-Tank Fryer

Dimension	290x440x410mm
Tank Volume	12L
Power	3.25KW
Voltage	220V/50Hz

FSFR0604E122

12L Electric
2-Tank Fryer

Dimension	580x440x410mm
Tank Volume	12Lx2
Power	6.5KW
Voltage	220V/50Hz



FSFR0504E42



FSFR0304E61



FSFR0204E41

FSFR0204E41 FSFR0504E42 FSFR0304E61 FSFR0504E62 FSFR0304E81 FSFR0504E82

	4L Electric 1-Tank Fryer	4L Electric 2-Tank Fryer	6L Electric 1-Tank Fryer	6L Electric 2-Tank Fryer	8L Electric 1-Tank Fryer	8L Electric 2-Tank Fryer
Dimension	220x390x370mm	460x390x370mm	260x410x285mm	540x410x285mm	260x410x340mm	540x410x340mm
Tank Volume	4L	4Lx2	6L	6Lx2	8L	8Lx2
Power	2KW	4KW	2.5KW	5KW	3.25KW	6.5KW
Voltage	220V/50Hz	220V/50Hz	220V/50Hz	220V/50Hz	220V/50Hz	220V/50Hz

With Temperature limiter



FSFR0305G61



FSFR0605G62



FSFR0305G61

Gas 1-Tank Fryer

Dimension	290x520x445mm
Tank Volume	12.9L
Power	5.2KW
Gas Type	LPG/NG

FSFR0605G62

Gas 2-Tank Fryer

Dimension	580x440x450mm
Tank Volume	12.9Lx2
Power	5.2KWx2
Gas Type	LPG/NG

Bain Marie

3/4/6 pan electric bain marie

Completely made in stainless steel

Heating quickly and excellent thermal insulation

Friendly design drainage device, simple and convenient operation



FSBM0604E3

FSBM0604E3

Electric 3-Pan
Bain Marie

Dimension	560x350x280mm
Power	1.8KW
Voltage	220V/50Hz
Pan	3*GN 1/3
Gross Weight	12.5KG



FSBM0706E4

FSBM0706E4

Electric 4-Pan
Bain Marie

Dimension	680x560x280mm
Power	1.8KW
Voltage	220V/50Hz
Pan	4*GN 1/2
Gross Weight	20.5KG



FSBM0706E6

FSBM0706E6

Electric 6-Pan
Bain Marie

Dimension	680x560x280mm
Power	1.8KW
Voltage	220V/50Hz
Pan	6*GN 1/3
Gross Weight	20KG



Griddle

Evenly heat distribution

Healthy and quick cooking with the mirror smooth plate for a direct temperature transfer.



Countertop Electric / Gas Griddle

Available with one temperature control or dual-control type.
Completely made in stainless steel. Stainless steel heating elements.
Thermostat regulation and warming lamps, gas type with fire probing hole.

Quick heating and high efficiency
Chrome plated griddle board to reduce heating loss
High-quality anti-corrosion stainless steel, non-sticking grease

Chrome coating with 3 phases of polishing

Chrome coating with 3 phases of polishing

The chrome surface ensures an excellent temperature transfer

Chrome plated griddle board to reduce heating loss

Quick heating and high efficiency

High-quality anti-corrosion stainless steel, non-sticking grease



Electric Griddle

Heating indicator light

All in one or divided into 2 cooking zone, accurate temperature control



FSGD0605EF



FSGD0705EF



FSGD0605GF



FSGD0706GF

Gas Griddle

With backsplash and removable fat collection drawer

Stainless steel casing and cooking plate - approved for food contact



FSGD0605EF

Electric Griddle
With Temperature limiter

Dimension	550x450x230mm
Power	3KW
Voltage	220V/50Hz
Gross Weight	28KG
Griddle Size	400*276mm

FSGD0705EF

2 Burners Electric Griddle
With Temperature limiter

Dimension	730x500x230mm
Power	4.4KW
Voltage	220V/50Hz
Gross Weight	41KG
Griddle Size	728*400mm

FSGD0605GF

2 Burners Gas Griddle
With Temperature limiter

Dimension	550x500x520mm
Power	5KW
Gross Weight	48KG
Gas Type	LPG/NG
Griddle Size	548*348mm

FSGD0706GF

Gas Griddle

Dimension	730x550x520mm
Power	10KW
Gross Weight	66.5KG
Gas Type	LPG/NG
Griddle Size	728*396mm

Salamander

Easy cleaning

The stainless steel food tray is completely removable.



Height adjustable

Move the mobile head to adjust the distance between food and heat elements



Enough heating elements

For fast and evenly heating

Electric Lift Salamander

Completely made in stainless steel

High performance heating elements placed under the mobile head

Adjustable heat of the cooking zones controlled by energy regulator

Movable top can adjust the distance between food and heating elements

Removable inside tray and grid



FSSD0505EL

Electric Salamander

Dimension	450x450x500mm
Power	2.8KW
Voltage	220V/50Hz

Electric/Gas Salamander

Accurate temperature control technology allows users to set temperature for a certain cooking period, so that the food will be evenly colored and achieve unified flavor.

It has a large space divided into several layers.



FSSD0603E



FSSD0805E
FSSD0604E



FSSD0605G



FSSD0905G

	FSSD0603E	FSSD0805E	FSSD0604E	FSSD0605G	FSSD0905G
	Counter Top Electric Salamander	Counter Top Electric Salamander	Counter Top Electric Salamander	Counter Top Gas Salamander	Counter Top Gas Salamander
Dimension	570x340x260mm	800x450x470mm	580x390x390mm	620x490x600mm	880x450x600mm
Power	2KW	7.2KW	4KW	6.5KW	9.5KW
Voltage	380V/50Hz	220V/50Hz	220V/50Hz	/	/
Gas Type	/	/	/	LPG/NG	LPG/NG
Net Weight	15KG	29KG	19KG	50KG	65KG
Gross Weight	17KG	32KG	21KG	55KG	70.5KG

Crepe Maker

Spiral heating element integrated under the cast iron plate
Thermostat 0 to 300°C, pilot light



FSCM0505E1



FSCM0905E2

FSCM0505E1

1-Plate Electric Crepe Maker

Dimension	450x485x235mm
Power	3KW
Voltage	220-240V/50Hz
Gross Weight	21KG
Material	Stainless Steel 201,1.0

FSCM0905E2

2-Plate Electric Crepe Maker

Dimension	860x485x235mm
Power	6KW
Voltage	220-240V/50Hz
Gross Weight	36.5KG
Material	Stainless Steel 201,1.0

Toaster



FSCT0404E

FSCT0404E

Electric Conveyor Toaster

Dimension	368x418x400mm
Power	2.3KW
Voltage	220V/50Hz
Net Weight	20.0KG

Panini Grill

Electric iron panini grill

To cook sandwich or hamburgers thoroughly, without reduction, retaining all the juice and vitamins. Fitted with cast iron plates for perfectly heat transfer



Heat-resistant handles, anti-hot and safer



Heating elements under each plate (grooved)



FSPG0604E1



FSPG0303E1



FSPG0403E1

FSPG0303E1

Electric Iron Grooved Panini Grill

Dimension
Working Area
Voltage
Power
Net Weight

290x305x210mm
214x214mm
110-120V or 220-240V/50-60Hz
1.75KW/120V, 1.8KW/230V
13KG

FSPG0403E1

Electric Iron Grooved Panini Grill

410x305x210mm
338x220mm
110-120V or 220-240V/50-60Hz
1.75KW/120V, 2.2KW/230V
19KG

FSPG0604E1

Electric Iron Grooved Panini Grill

570x350x210mm
2x214x214mm
110-120V or 220-240V/50-60Hz
2x1.75KW/120V, 3.6KW/230V
25KG

Waffle Machine



Waffle Machine



Stainless steel body with unique L-shaped design
 Durable bake plate with sufficient large baking area
 Regulation by thermostat, constant temperature heating



	FSWM0304E6	FSWM0304E2
	Desktop Six Grid Waffle Machine	Waffle Maker
Dimension	310x380x255mm	320x380x266mm
Power	2000W	2000W
Voltage	220V/50Hz	220V/50Hz

Muffin Hot Dog & Corn Waffle Maker



FSWM0403EH



FSWM0403ECH



FSWM0403EC

Sandwich Maker & Flat Waffle Maker



FSSM0403ES



FSSM0403ET



FSCB0302E

FSWM0403EH

Muffin Hot Dog Maker

FSWM0403ECH

Muffin Hot Dog & Corn Waffle Maker

FSWM0403EC

Corn Waffle Maker

Dimensions	380 x 300 x 265mm	380 x 300 x 265mm	380 x 300 x 265mm
Voltage	220V/50Hz	220V/50Hz	220V/50Hz
Power	1.5kW	1.5kW	1.5kW
Temperature Range	0-300°C	0-300°C	0-300°C
Material	Stainless Steel 201	Stainless Steel 201	Stainless Steel 201
Gross Weight	11kg	11kg	11kg
Net Weight	13kg	14kg	15kg
Package Dimensions	425 x 370 x 275mm	425 x 370 x 275mm	425 x 370 x 275mm

FSSM0403ES

Sandwich Maker

FSSM0403ET

Sandwich Maker

FSCB0302E

Cone Baker

Dimensions	380 x 300 x 265mm	380 x 300 x 265mm	320 x 225 x 260mm
Voltage	220V/50Hz	220V/50Hz	220V/50Hz
Power	1.5kW	1.5kW	1kW
Temperature Range	0-300°C	0-300°C	0-300°C
Material	Stainless Steel 201	Stainless Steel 201	Stainless Steel 201
Gross Weight	11kg	11kg	9kg
Net Weight	10kg	17kg	7kg
Package Dimensions	425 x 370 x 275mm	425 x 370 x 275mm	415 x 280 x 300mm

Sauce Warmer



FSSW0201EL

FSSW0201EL

1 Head Sauce Warmer



FSSW0302EL

FSSW0302EL

2 Head Sauce Warmer



FSSW0402EL

FSSW0402EL

3 Head Sauce Warmer

Dimensions	220 x 150 x 320mm	270 x 220 x 300mm	400 x 220 x 300mm
Voltage	220V/50hz	220V/50hz	220V/50hz
Power	0.2kW	0.4kW	0.6kW
Temperature Range	0-80°C	0-80°C	0-80°C
Material	Stainless Steel 201	Stainless Steel 201	Stainless Steel 201
Gross Weight	3kg	5kg	6.5kg
Net Weight	2.5kg	4.5kg	6kg
Package Dimensions	275 x 200 x 310mm	380 x 275 x 310mm	460 x 270 x 310mm



FSSW0201ES



FSSW0302ES

	FSSW0201ES	FSSW0302ES
	1 Head Sauce Warmer	2 Head Sauce Warmer
Dimensions	180 x 150 x 380mm	280*200*410mm
Voltage	220V/50hz	220V/50hz
Power	0.8kW	1.6kW
Temperature Range	0-80°C	0-80°C
Material	Stainless Steel 201	Stainless Steel 201
Gross Weight	5kg	10kg
Net Weight	4.5kg	9.5kg
Package Dimensions	210 x 200 x 420mm	320 x 240 x 460mm

Other Snack Equipment

Essential for your breakfast buffets, the series snack machines are be the most obvious choices Waffle, fish cake or 2 eggs, then with a cup of milk or a glass of orange juice, to make a light breakfast.



FSFB0304E



FSEB0402E

	FSFB0304E	FSEB0402E
	Single Head Fish Cake Machine	6 Egg Boiler
Dimension	380x340x255mm	370x230x300mm
Voltage	220V/50Hz	220-240V/50-60Hz
Power	1.6KW	2.5KW
Net Weight	11KG	5KG

Electric Grill



FSEGL-0205

FSEGL-0205

Electric Counter Top Grill



FSEGL-0505

FSEGL-0505

Electric Counter Top Grill


Dimensions	280*556*140mm	525*556*140mm
Voltage	220V/50Hz	220V/50Hz
Power	2.6kW	5.2kW
Net Weight	4kg	6.6kg
Gross Weight	5kg	7.6kg
Parking Dimension	320*605*160mm	565*605*160mm



FSEGL-0503

FSEGL-0503

Electric Counter Top Grill



FSEGL-0604

FSEGL-0604

Electric Counter Top Grill



FSEGL-1003

FSEGL-1003

Electric Counter Top Grill

Dimensions	560*290*180mm	625*530*180mm	1075*280*180mm
Voltage	220V/50Hz	220V/50Hz	220V/50Hz
Power	2.6kW	5.2kW	5.2kW
Net Weight	5.3kg	9.1kg	9kg
Gross Weight	6.2kg	10.5kg	10.7kg
Parking Dimension	600*330*200mm	665*570*200mm	1105*320*200mm

Electric Over



FSEO-0605A

FSEO-0605A

Electric Oven (Mechanical)



FSEO-0605B

FSEO-0605B

Electric Oven With Spray (Mechanical)

Dimensions	595*530*570mm	595*530*570mm
Voltage	220V/50Hz	220V/50Hz
Power	2.6kW	2.6kW
Net Weight	39kg	39kg
Gross Weight	41.5kg	41.5kg
Parking Dimension	650*600*650mm	650*600*650mm



FSEO-0705A

FSEO-0705A

Electronic Oven



FSEO-0705B

FSEO-0705B

Electronic Oven (Mechanical)

Dimensions	680*500*640mm	680*500*640mm
Voltage	220V/50Hz	220V/50Hz
Power	4.5kW	4.5kW
Net Weight	27kg	27kg
Gross Weight	30kg	30kg
Parking Dimension	780*600*690mm	780*600*690mm

Toaster



FSET-0303

FSET-0303

Electric 4-Slicer Commercial Toaster

Dimensions	280*556*140mm
Voltage	220V/50Hz
Power	2.6kW
Net Weight	4kg
Gross Weight	5kg
Parking Dimension	320*685*160mm



FSET-0403

FSET-0403

Electric 4-Slicer Commercial Toaster

Dimensions	300*270*225mm
Voltage	220V/50Hz
Power	1.8kW
Net Weight	3kg
Gross Weight	3.5kg
Parking Dimension	320*290*240mm



FSEEC-0402

FSEEC-0402

Egg Waffle Maker

Dimensions	420*225*290mm
Voltage	220V/50Hz
Power	1.4kW
Net Weight	5.3kg
Gross Weight	6.5kg
Parking Dimension	450*300*240mm



FSEWM-0403B

FSEWM-0403B

Single head Waffle Maker

Dimensions	390*250*260mm
Voltage	220V/50Hz
Power	1.3kW
Net Weight	5.5kg
Gross Weight	6.2kg
Parking Dimension	430*305*295mm



FSEWM-0504

FSEWM-0504

Double head Waffle Maker

Dimensions	600*390*260mm
Voltage	220V/50Hz
Power	2.6kW
Net Weight	13kg
Gross Weight	14kg
Parking Dimension	550*425*295mm

Waffle Maker



FSEMM-0403

FSEMM-0403

Lolly Waffle Maker

Dimensions	375*300*170mm
Voltage	220V/50Hz
Power	0.85kW
Temperature range	0-300°C
Net Weight	8.1kg
Gross Weight	8.7kg
Parking Dimension	410*450*220mm



FSEFM-0604

FSEFM-0604

Electric Taiyaki Machine

Dimensions	585*375*265mm
Voltage	220V/50Hz
Power	3kW
Fish Dimensions	128*78*8mm
Net Weight	11kg
Gross Weight	12kg
Parking Dimension	620*425*265mm



FSEHM-0604

FSEHM-0604

Hamburger Bun Toaster

Dimensions	660*406*290mm
Voltage	220V/50Hz
Power	2.4kW
Net Weight	15kg
Gross Weight	17kg
Parking Dimension	740*470*370mm



Paster Cooker



FSEPC-0406

FSEPC-0406

4 Baskets Pasta Cooker



FSEPC-0606

FSEPC-0606

6 Baskets Pasta Cooker

Dimensions	415*600*265mm	590*580*265mm
Voltage	220V/50Hz	220V/50Hz
Power	4kW	6kW
Net Weight	11kg	15.5kg
Gross Weight	12kg	16.5kg
Parking Dimension	620*420*270mm	620*600*270mm



Shawarma Kebab



FSEKB-0507

FSEKB-0507

3 Burners Electric Shawarma Kebab Machine



FSEKB-0509

FSEKB-0509

4 Burners Electric Shawarma Kebab Machine

Dimensions	500*600*700mm	300*600*900mm
Voltage	220V/50Hz	220V/50Hz
Power	6kW	8kW
Net Weight	23kg	36kg
Gross Weight	25kg	38kg
Parking Dimension	540*650*750mm	340*650*950mm

Display Warmer



FSECW-0703

FSECW-0703

2-Layer 2 Pans Countertop Display Warmer



FSEWC-0706

FSEWC-0706

2-Layer 4 Pans Countertop Display Warmer



FSEWC-1006

FSEWC-1006

2-Layer 6 Pans Countertop Display Warmer

Dimensions	410*680*760mm	690*650*760mm	990*630*760mm
Voltage	220V/50Hz	220V/50Hz	220V/50Hz
Power	0.8kW	0.8kW	1.6kW
Net Weight	20kg	30kg	40kg
Gross Weight	24kg	36kg	47kg
Parking Dimension	460*680*760mm	742*680*760mm	1040*680*760mm



FSGKB-0508

FSGKB-0508

3 Burners Gas Shawarma Kebab Machine



FSGKB-0510

FSGKB-0510

4 Burners Gas Shawarma Kebab Machine

Dimensions	500*600*800mm	500*600*1000mm
Voltage	220V/50Hz	220V/50Hz
Net Weight	23kg	25kg
Gross Weight	25kg	27kg
Parking Dimension	540*650*850mm	540*650*1050mm

Smoothie Blender



B400

B400

1.5L Smoothie Blender

Package Dimension	290*295*495mm
Voltage	220V/50Hz
Power	1500W
Capacity	1.5L
Net Weight	6.3kg
Gross Weight	6.75kg



Planetary Mixer



FFPM-5L
FFPM-7L

FFPM-5L

5L Planetary Mixer

FFPM-7L

7L Planetary Mixer

Dimension	420*240*425mm	420*240*425mm
Capacity	5L	7L
Voltage	110-400V/50-60Hz/0.27PH	110-400V/50-60Hz/0.27PH
Power	200W	280W
Speed	speedless setting	speedless setting
Net Weight	15kg	17kg
Packing Dimension	485*320*500mm	485*320*500mm
Material	aluminum,the bucket is stainless steel 304	aluminum,the bucket is stainless steel 304



FFPM-10L



FFPM-20L



FFPM-30L

FFPM-10L

10L Planetary Mixer

FFPM-20L

20L Planetary Mixer

FFPM-30L

30L Planetary Mixer

Dimension	395*395*610mm	555*558*794mm	579*611*1142mm
Capacity	10L	20L	30L
Voltage	110-400V/50-60Hz/1PH	110-400V/50-60Hz/1.5PH	110-400V/50-60Hz/2PH
Power	550W	1100W	1500W
Speed	108/195/355r/min	108/195/355r/min	91/166/282r/min
Net Weight	36kg	64kg	178kg
Packing Dimension	505*475*710mm	630*590*910mm	710*670*1270mm
Material	aluminum,the bucket is stainless steel 304	aluminum,the bucket is stainless steel 304	aluminum,the bucket is stainless steel 304

